


MRGD300/MRGD500/MRGD750 SERIES

3, 5 and 7-1/2 HP Grinder Pumps



SPECIFICATIONS

Applications	Residential and Commercial Sewage	
Capacities	175 GPM	662 LPM
Shut-off Head	150'	45.7 m
Liquids Handling	raw sewage	
Intermittent Liquid Temp.	130°F	55°C
Motor Electrical Data	Manual model — control panel required	
Acceptable pH Range	5–9	
Discharge NPT	2"	50.8 mm
Sump Diameter Duplex	36"	762 mm
Motor Housing	cast iron	
Impeller	hardened stainless steel	
Power Cord	25'	
Shaft Seal Standard	dual, carbon & ceramic	
Pump, Motor Shaft	stainless steel	
Cutters	hardened stainless steel	

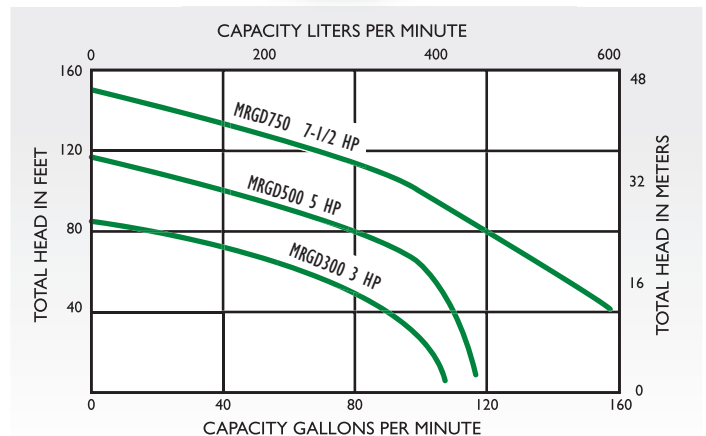

FEATURES



- 3, 5 or 7-1/2 HP
- Class 30 cast iron construction
- 2" NPT discharge
- Carbon/ceramic shaft seal
- Oil-filled motor with automatic reset overload provides safe operation
- Ball-bearing construction for long life
- Easily field replaceable power cord
- Control panels required (sold separately)
- Leg kit available (sold separately)

MRGD300/MRGD500/MRGD750 SERIES

3, 5 and 7-1/2 HP Grinder Pumps

OUTLINE DIMENSIONS

SECTIONAL VIEW

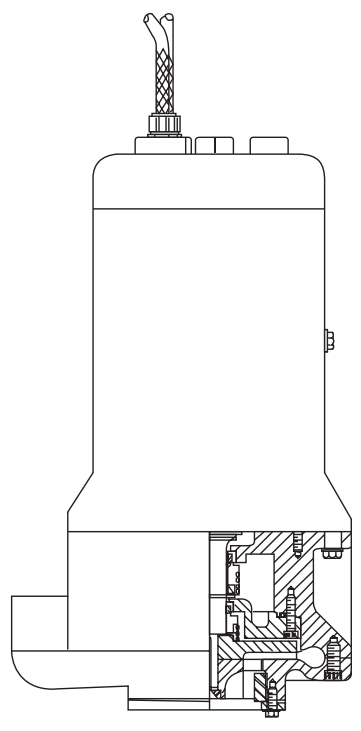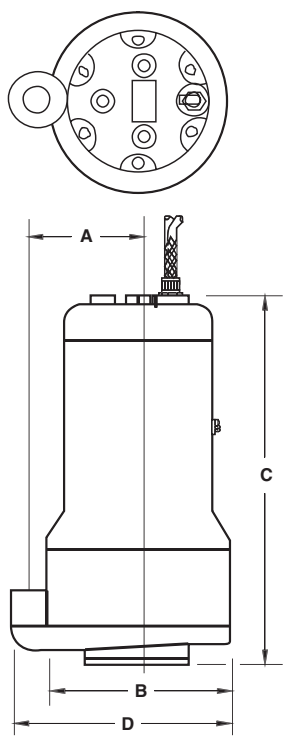

Catalog Number	A	B	C	D
MRGD300/500/750	8"	10-5/8"	21-3/4"	14-3/4"

Dimensions (in inches) are for estimating purposes only.