

MCSP

1/3 Horsepower
Pedestal Sump Pumps



MCSP3

MCSP3I

ADVANTAGES BY DESIGN

- Split phase motors; no starting switches or relays required.
- Thermal overload protection to prevent motor burn-out.
- Top-mounted adjustable float switch for easy accessibility
- Fits 12" diameter x 24" deep or larger sump pits.
- Available with corrosion resistant thermo-plastic or cast iron pump housing and base.
- Top-screened inlet to reduce clogging.
- 8' heavy duty cord with three-pronged grounded plug.

PRODUCT CAPABILITIES

Capacities To	55 gpm	189.3 lpm
Heads To	18 ft.	5.5 m
Pump Down Range	9-10"	228-254 mm
Solids Handling	1/8"	3.18 mm
Liquids Handling	drain water	
Intermittent Liquid Temp.	140° F	60° C
Motor	1/3 hp split-phase, 1625 rpm	
Electrical	115V, 5.7 amps, 1Ø, 60 Hz	
Acceptable pH Range	6 - 9	
Discharge, NPT	1-1/4"	31.8 mm
Minimum Sump Dia.	12"	304.8 mm

Construction Materials	MCSP3	MCSP3I
Volute	Thermoplastic	Cast Iron
Impeller	Thermoplastic	
Column	Thermoplastic	Steel
Shaft	PVC	Steel
Float	Thermoplastic	

THE ECONOMICAL SOLUTION FOR BOTH NEW INSTALLATIONS AND REPLACEMENT UNITS. Ease of installation and fully adjustable operating cycle make MCSP pedestal sump pumps the ideal solution for residential basement drainage. The overload-protected motor and top-mounted float switch will provide years of trouble-free service. For more information, contact your Myers distributor, or the Myers Ohio sales office at 419/289-1144.

WHERE INNOVATION MEETS TRADITION

MCSP

1/3 Horsepower
Pedestal Sump Pumps


TOP MOUNTED SWITCH
Double-pole design for years of service.

SPLIT-PHASE MOTOR
Requires no start relays or switches. Automatic overload


THERMOPLASTIC FLOAT
Corrosion resistant; easily adjustable to fit the application

TOP SUCTION STRAINER
Filters solids to eliminate pump damage.


PUMP HOUSING/BASE
Available in either thermoplastic or cast iron. 1-1/4" NPT discharge.

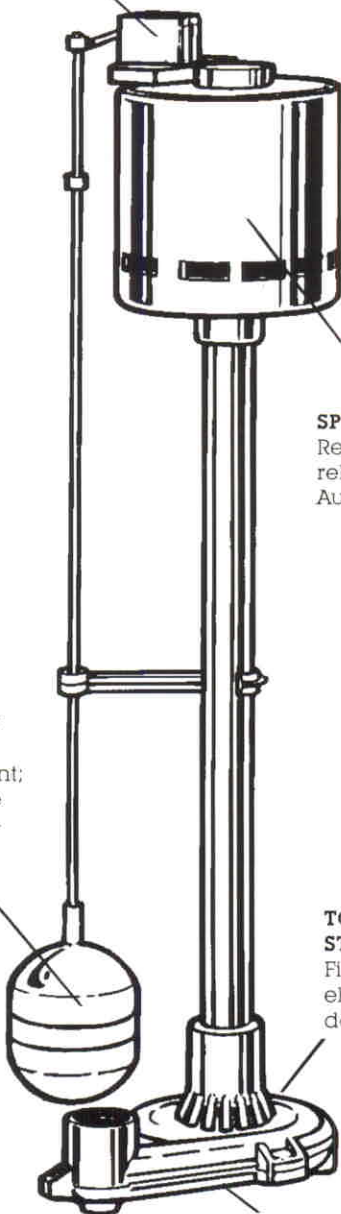

DIMENSIONS

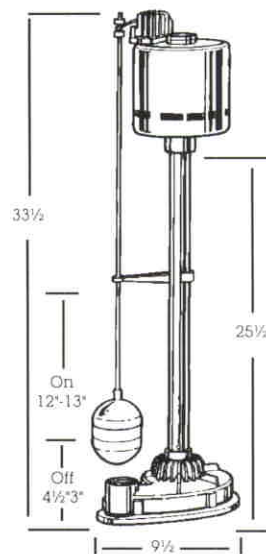


MCSP3
Thermoplastic

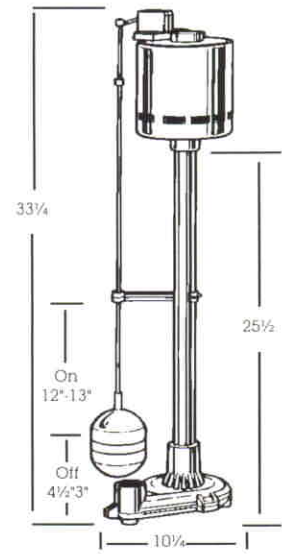

MCSP3I
Cast Iron

PERFORMANCE CURVE

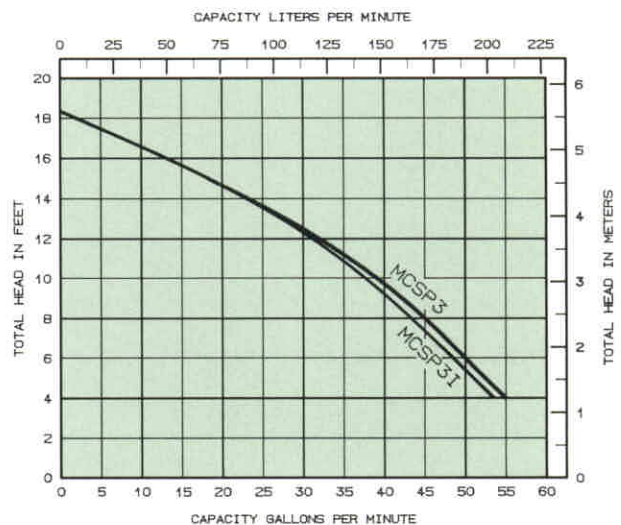

K3513 10/00
Printed in U.S.A.



Myers[®]
Pentair Pump Group

F. E. Myers, 1101 Myers Parkway, Ashland, Ohio 44805-1969
419/289-1144, FAX: 419/289-6658, www.femyers.com
Myers (Canada), 269 Trillium Drive, Kitchener, Ontario N2G 4W5
519/748-5470, FAX: 519/748-2553