

MCU20S

Condensate Unit



THE IDEAL SOLUTION TO THE AUTOMATIC REMOVAL OF EXCESS LIQUID FROM AIR CONDITIONING AND HEATING SYSTEMS, REFRIGERATION EQUIPMENT AND MUCH MORE.

Please contact your Myers distributor, or the Myers Ohio sales office at 419-289-1144 for more details.

APPLICATIONS

- Air conditioner
- Dehumidifier
- Ice makers
- High efficiency furnaces
- Refrigeration systems
- Water coolers

ADVANTAGES BY DESIGN

- Lifts to 20 feet.
- Built-in safety switch.
- Low profile unit, only 4½ inches high.
- Thermal overload protection.
- High temperature housing.
- Built-in check valve.
- Double insulated enclosure.

PROVIDES LONGER LIFE THAN SIMILAR CONDENSATE UNITS.

- Bearingless sealed motor offers a more reliable longer life product.

* For indoor use only

PRODUCT CAPABILITIES

Capacities To	95 gph	360 lph
Heads To	20 ft.	6.1 m
Weight	3.25 lbs.	
Liquids Handling	drain water	
Intermittent Liquid Temp.	190° F	
Motor	bearingless sealed motor	
Electrical	115V, 1.45 amps, 1Ø, 60 Hz	
Dimensions	11" x 5" x 4¾"	
Discharge	3/8" I.D. plastic tubing (not included)	
Tank Capacity	2 quarts	


Construction Materials

Housing	ABS, high temp, acid resistant thermoplastic
Power Cord	6 ft.

WHERE INNOVATION MEETS TRADITION


MCU20S

Condensate Unit

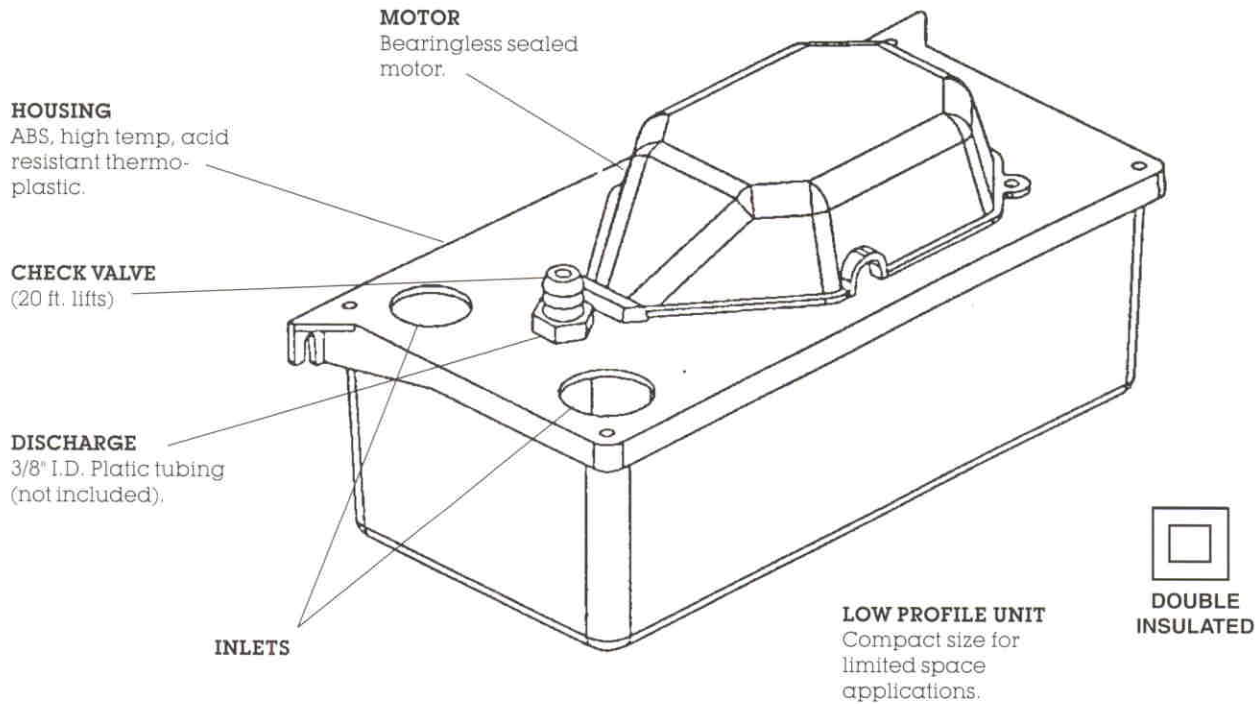

DIMENSIONS

[] dimensions in mm

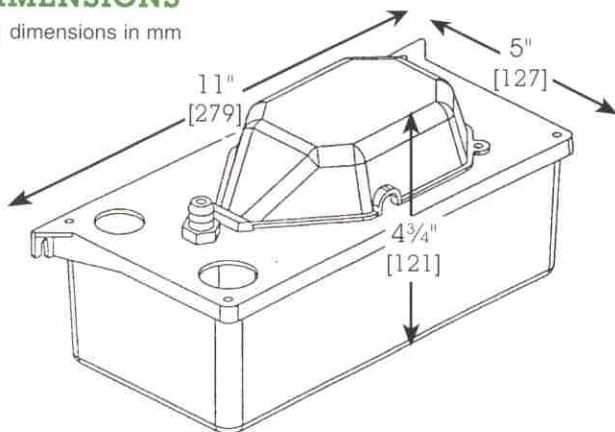

PERFORMANCE CHART

Flows (GPH)	Heads (Ft.)
95	1
85	5
70	10
45	15
0	20

