


# MUSPI25

## Utility Sink Pump

### SPECIFICATIONS

Capacities	31 GPM	117.3 LPM
Shut-off Head	13'	3.96 m
Liquids Handling	drain water	
Intermittent Liquid Temp.	up to 120°F	up to 50°C
Weight	15 lbs.	
Motor	1/8 HP	
Electrical	115V, 15A, 1Ø, 60Hz	
Housing	thermoplastic	
Power Cord	8' three-prong, SJTW	

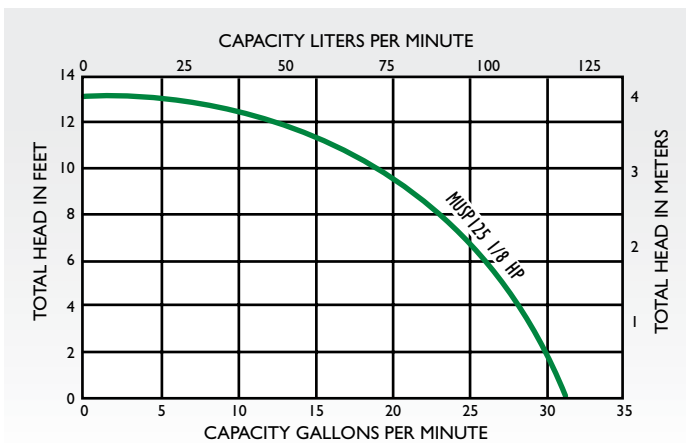

### FEATURES

- Ideal for basement wet bars, laundry and utility sinks
- Designed to be used with a sink where gravity drain line is not available
- Fully automatic operation
- Complete, compact system
- Easy to install – eliminates the need for traps, vents and costly labor
- Quiet, trouble-free operation – easily mounts beneath your sink
- Includes pump assembly, fiber gasket and o-ring, 1" NPT to slip outlet adapter, one-way valve, discharge shut-off/flow balancing valve, strainer cup and 90-degree elbow