Water Transfer


Onga Hi-Flo Moulded Centrifugal Pumps The Onga Hi-Flo range delivers all the benefits: from high performance and efficiency to wide choice in performance and construction materials. And if that's not enough – take a look at the Onga OCS range of stainless steel centrifugal pumps on page 22.

14 Series



Onga is a leader in the use of injection moulding for pump components. This is evident in the 14 series, which couples hydraulic design and corrosion-resistant high grade moulded materials. This provides a general purpose pump that is suitable for high head water transfer, tank filling, irrigation and circulation duties. Flows of up to 500 litres per minute or heads over 40 metres are available from this range.



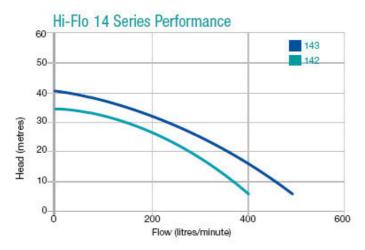

MODEL	KW	
Hi-Flo 143	2.4	18
Hi-Flo 142	1.5	- 18

Suction & Discharge 1 1/2" M BSP Suction & Discharge

Moulded Centrifugal Pumps features		
Award winning Hi-Flo impeller	High pressure, high flow and great efficiency with lower operating cost	
Moulded pump casing	Corrosion resistant and lightweight	
Close coupled to a TEFC motor	Resistant to water ingress, vermin proof, and high efficiency	
Single or three phase	This option available for 143/183	
Inbuilt thermal overload	Protects motor from overheating through pump jamming or similar	



