
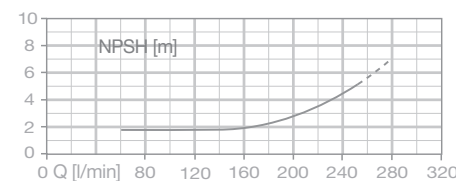
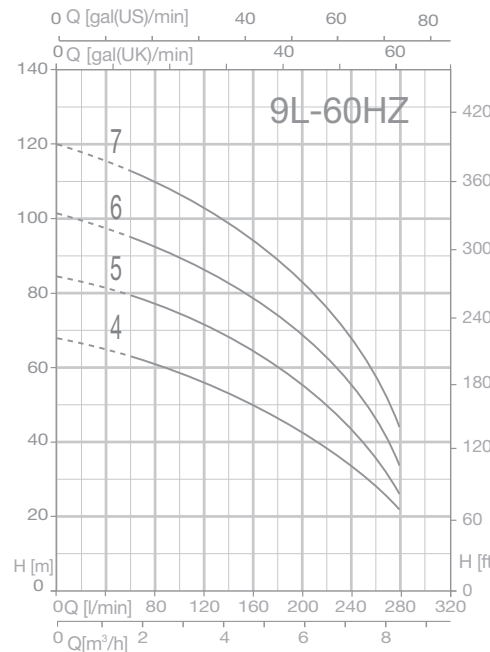
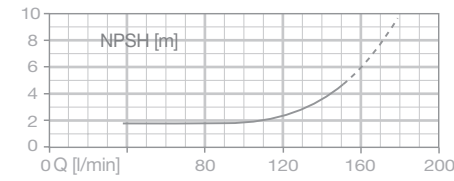
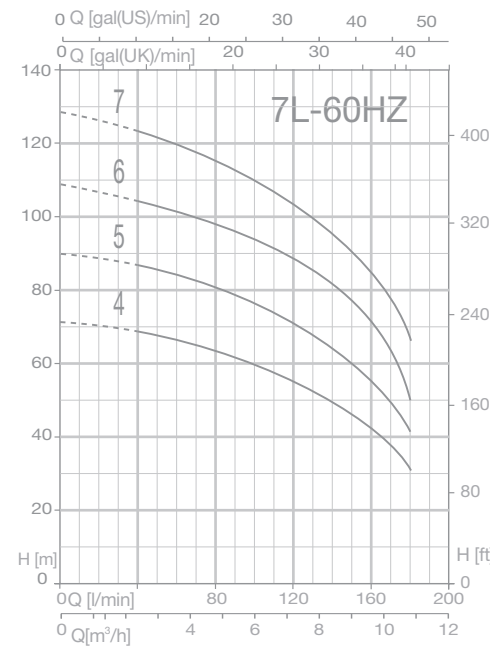
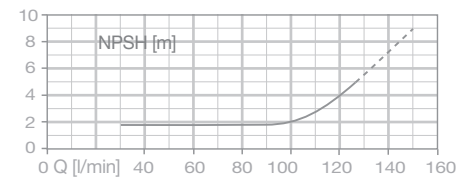


ULTRA - L / in Line

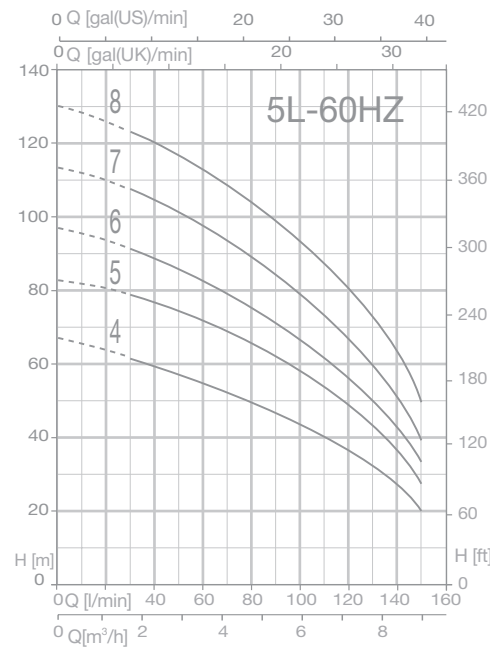

DATI TECNICI - TECHNICAL DATA - DONNEES TECHNIQUES - DATOS TECNICOS

TIPO / TYPE MODELO / MODÈLE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)										DNA	DNM
1~	3~	(HP)	(kW)	1~	3~	1~	3~	0	1.8	2.4	3.6	4.8	6	7.2	8.4	9			
U 5L-180/4	U 5L-180/4 T	1.8	1.3	1.93	1.78	9.2	3.2	65.8	62.2	60.1	55.7	50.6	44.6	37.2	27.5	14.3	1"1/4 G	1"1/4 G	
U 5L-250/5	U 5L-250/5 T	2.5	1.85	2.50	2.29	11.7	4.2	83.2	78.9	76.7	71.8	66.0	58.7	49.9	37.9	21.9	1"1/4 G	1"1/4 G	
U 5L-300/6	U 5L-300/6 T	3	2.2	3.01	2.79	14.4	5.2	97.1	91.9	89.3	83.0	75.5	66.7	56.8	44.7	34.3	1"1/4 G	1"1/4 G	
-	U 5L-350/7 T	3.5	2.57	-	3.24	-	5.9	114.4	107.6	104.7	98.2	89.9	80.3	68.7	52.6	38.4	1"1/4 G	1"1/4 G	
-	U 5L-400/8 T	4	3	-	3.77	-	7.3	130.4	123.4	120.3	113.1	104.2	93.2	79.9	63.4	52.5	1"1/4 G	1"1/4 G	

TIPO / TYPE MODELO / MODÈLE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)										DNA	DNM
1~	3~	(HP)	(kW)	1~	3~	1~	3~	0	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8			
U 7L-300/4	U 7L-300/4 T	3	2.2	3.09	2.81	14.3	5.2	71.8	68.9	66.0	62.9	59.1	54.6	49.2	42.7	31.0	1"1/4 G	1"1/4 G	
-	U 7L-400/5 T	4	3	-	3.65	-	7.0	89.5	86.4	83.5	80.2	75.9	71.0	65.0	57.3	40.0	1"1/4 G	1"1/4 G	
-	U 7L-450/6 T	4.5	3.37	-	4.46	-	7.8	108.0	108.0	101.5	97.7	93.0	87.2	80.6	71.4	49.0	1"1/4 G	1"1/4 G	
-	U 7L-550/7 T	5.5	4	-	5.23	-	9.3	127.2	127.2	120.3	116.2	111.2	104.7	96.9	86.9	65.0	1"1/4 G	1"1/4 G	

TIPO / TYPE MODELO / MODÈLE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)																DNA	DNM
1~	3~	(HP)	(kW)	1~	3~	1~	3~	0	3.6	4.8	6	7.2	8.4	9.6	10.8	12	13.2	14.4	15.6	16.8					
U 9L-350/4	U 9L-350/4 T	3.5	2.57	3.24	2.91	15.0	5.5	67.4	62.1	60.2	58.3	56.3	53.8	50.8	47.3	42.8	38.0	32.8	27.2	21.0	1"1/2 G	1"1/2 G			
-	U 9L-400/5 T	4	3	-	1.79	-	7.1	84.8	78.8	76.8	74.6	72.1	69.1	65.4	61.2	55.3	49.2	42.7	35.3	27.5	1"1/2 G	1"1/2 G			
-	U 9L-450/6 T	4.5	3.37	-	4.64	-	8.1	101.0	95.3	93.0	90.4	87.5	84.1	79.8	74.4	67.9	59.9	51.8	43.3	35.0	1"1/2 G	1"1/2 G			
-	U 9L-550/7 T	5.5	4	-	5.44	-	9.6	119.0	112.7	110.3	107.6	104.5	100.6	95.5	89.9	82.6	73.2	63.2	52.5	43.9	1"1/2 G	1"1/2 G			

Corpo pompa e supporto: ghisa. Giranti e Diffusori: Noryl® Camicia: acciaio cromo-nickel AISI 304. Temperatura max liquido: da +5 a +35°C. Pressione max: 8 bar ≤ 6 giranti; 14 bar > 6 impellers.

Pump body and bracket: cast-iron. Impellers and diffusers: Noryl® Shell: AISI 304 cromo-nickel stainless steel. Max temperature liquid: from +5 to +35 °C. Max working pressure: 8 bar ≤ 6 impellers; 14 bar > 6 impellers.

Cuerpo bomba: fundición. Rodetes, difusores: Noryl®. Camisas: acero cromo nickel AISI 304. Temperatura max liquido: de + 5 a + 35 °C. Maxima presión: 8 bar ≤ 6 rodetes; 14 bar > 6 giranti.

Corps de pompe: fonte. Roues, diffuseurs: Noryl®. Chemise: acier au chrome-nickel AISI 304. Température du liquide: de + 5 à + 35 °C. Pression max: 8 bar ≤ 6 rodetes; 14 bar > 6 giranti.