
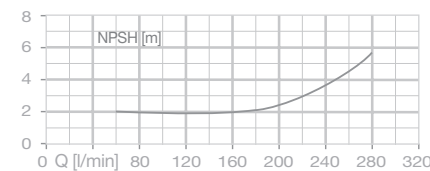
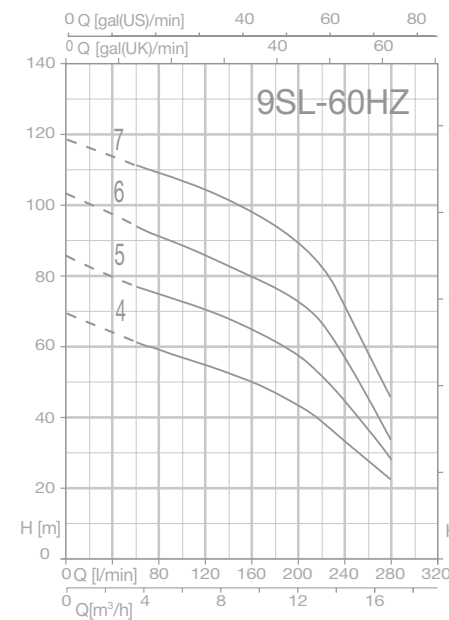
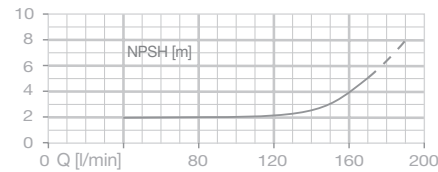
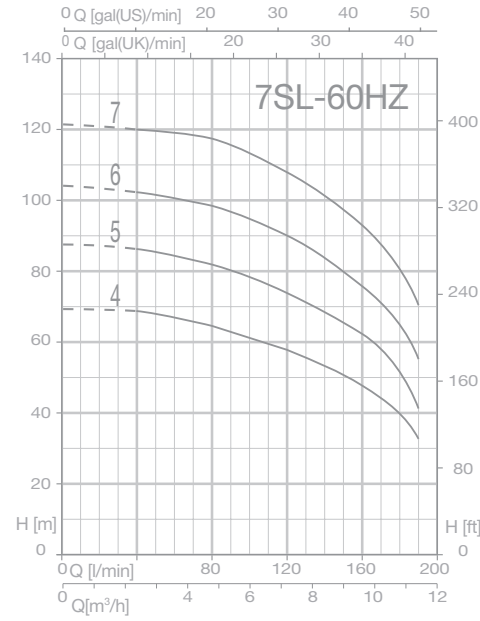
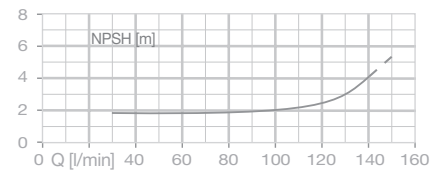


ULTRA - SL / in Line

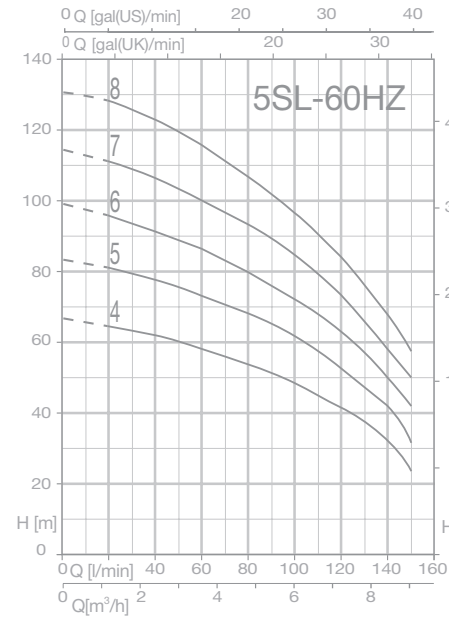

DATI TECNICI - TECHNICAL DATA - DONNEES TECHNIQUES - DATOS TECNICOS

TIPO / TYPE MODELO / MODÈLE		P2 (HP) (kW)		P1 (kW)		AMPERE		Q (m³/h - l/min)										DNA	DNM
						1~	3~	0	1.8	2.4	3.6	4.8	6	7.2	8.4	9			
1~	3~			1~	3~	1x220V 60Hz	3x380V 60Hz	H (m)											
U 5SL-180/4	U 5SL-180/4 T	1.8	1.3	1.84	1.72	8.6	3.1	66.2	63.2	61.6	58.0	53.6	48.3	41.3	32.5	26.7	1"1/4 G	1"1/4 G	
U 5SL-250/5	U 5SL-250/5 T	2.5	1.85	2.38	2.20	11.2	4.1	83.6	79.6	77.7	73.4	58.2	61.5	53.0	41.5	34.6	1"1/4 G	1"1/4 G	
U 5SL-300/6	U 5SL-300/6 T	3	2.2	2.84	2.64	13.0	4.8	99.1	94.0	91.6	86.5	80.1	72.7	63.0	50.2	42.2	1"1/4 G	1"1/4 G	
-	U 5SL-350/7 T	3.5	2.57	-	3.07	-	5.6	114.4	109.0	106.2	100.0	93.3	84.5	73.6	58.4	49.5	1"1/4 G	1"1/4 G	
-	U 5SL-400/8 T	4	3	-	3.51	-	6.9	130.9	124.6	121.7	115.0	106.7	97.0	84.0	67.4	57.3	1"1/4 G	1"1/4 G	

TIPO / TYPE MODELO / MODÈLE		P2 (HP) (kW)		P1 (kW)		AMPERE		Q (m³/h - l/min)										DNA	DNM
						1~	3~	0	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8	11.4		
1~	3~			1~	3~	1x220V 60Hz	3x380V 60Hz	H (m)											
U 7SL-300/4	U 7SL-300/4 T	3	2.2	3.01	2.77	14.2	5.2	69.5	67.7	66.8	65.0	62.2	58.2	53.4	47.8	40.0	31.8	1"1/4 G	1"1/4 G
-	U 7SL-400/5 T	4	3	-	3.52	-	6.9	87.1	85.2	84.1	82.3	79.1	74.7	68.9	61.8	52.0	41.0	1"1/4 G	1"1/4 G
-	U 7SL-400/6 T	4.5	3.37	-	4.36	-	7.7	103.5	101.8	101.0	98.9	94.8	89.7	83.6	75.8	66.0	55.0	1"1/4 G	1"1/4 G
-	U 7SL-550/7 T	5.5	4	-	5.12	-	9.2	121.2	120.3	119.8	117.6	113.2	107.8	100.8	92.0	80.6	72.4	1"1/4 G	1"1/4 G

TIPO / TYPE MODELO / MODÈLE		P2 (HP) (kW)		P1 (kW)		AMPERE		Q (m³/h - l/min)																DNA	DNM
						1~	3~	0	3.6	4.8	6	7.2	8.4	9.6	10.8	12	13.2	14.4	15.6	16.8					
1~	3~			1~	3~	1x220V 60Hz	3x380V 60Hz	H (m)																	
U 9SL-350/4	U 9SL-350/4 T	3.5	2.57	3.23	2.91	14.7	5.4	69.6	62.7	60.8	58.7	56.4	53.9	51.3	48.5	44.2	39.2	33.8	27.8	21.5	1" 1/2 G	1" 1/2 G			
-	U 9SL-400/5 T	4	3	-	3.70	-	7.1	86.5	79.4	77.3	74.9	72.2	69.2	65.9	62.3	57.2	51.3	44.3	36.3	28.1	1" 1/2 G	1" 1/2 G			
-	U 9SL-450/6 T	4.5	3.37	-	4.56	-	8.0	103.1	95.5	93.5	90.9	87.5	84.0	80.2	75.9	69.8	61.9	53.0	43.7	33.3	1" 1/2 G	1" 1/2 G			
-	U 9SL-550/7 T	5.5	4	-	5.37	-	9.6	119.0	113.4	111.1	108.4	104.9	101.2	97.0	92.5	85.9	77.5	67.5	56.6	44.8	1" 1/2 G	1" 1/2 G			

Corpo pompa e supporto: ghisa. **Giranti, diffusori e camicia:** acciaio cromo-nichel AISI 304. **Temperatura max liquido:** da -15 a +110°C. **Pressione max:** 8 bar ≤ 6 giranti; 14 bar > 6 impellers.

Pump body and bracket: cast-iron. **Impeller:** AISI 304 cromo-nichel stainless steel. **Max temperature liquid:** from -15 to +110 °C. **Max working pressure:** 8 bar ≤ 6 impellers; 14 bar > 6 impellers.

Cuerpo bomba: fundición. **Rodetes, camisas, difusores:** acero cromo nickel AISI 304. **Temperatura max liquido:** de -15 a + 110 °C. **Maxima presión:** 8 bar ≤ 6 rodetes; 14 bar > 6 giranti.

Corps de pompe: fonte. **Roues, chemise, diffuseurs:** acier au chrome-nichel AISI 304. **Température du liquide:** de -15 à + 110 °C. **Pression max:** 8 bar ≤ 6 rodetes; 14 bar > 6 giranti.