

PERIFLO

PUMPS in ACTION












FEATURES

Corrosion Resistant
Low Operating Speeds
Long Tube Life
Will Not Vapor-Lock
Self Priming to 30 ft.
Operating Pressures to 115 PSI
Metering Accuracy +/- 1%
Safety Sealed Pump Head
Pressure Rated Connections
Early Leak Detection
Wide Flow Control Range
UL Listed NEMA 4X Controls

	CT-10	CT-13	CT-16	CT-19	CT-22
CAPACITY	.006 gal/rev	.010 gal/rev	.025 gaVrev	.032 gal/rev	.066 gal/rev
MAX FLOW RATE	22 GPH	36 GPH	90 GPH	115 GPH	238 GPH
CONNECTIONS	3/8"	3/8"	3/4"	1'	ľ
COMPRESSOR SYSTEM	ROLLERS				
REINFORCED HOSES to 115 PSI	NATURAL RUBBER BUNA N EPDM HYPALON			NOT AVAILABLE	NATURAL RUBBER BUNA N EPDM HYPALON
THERMOPLASTIC TUBES to 30 PSI	NORPRENE	NORPRENE	NORPRENE TYGON	NORPRENE TYGON	NORPRENE TYGON

NORPRENE meets FDA, 3-A & NSF Criteria



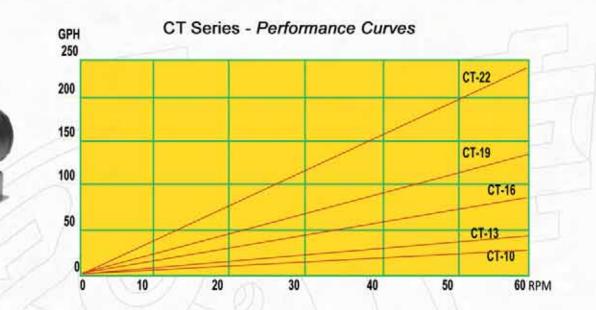





Corrosion Resistant Construction

Body: HALAR Coated Aluminum for Superior Strength and

Maximum Chemical Resistance.

Rotor: High Performance Engineered Plastic for Rugged Reliability

and Chemical Resistance.

Roller Shafts: 316SS for Maximum Chemical Resistance and Long Life.

Roller/Bearing: One-Piece High Performance Engineered Plastic for

Simplicity, High Performance and Chemical Resistance.

Connections: Rigid 316SS, PVC, Polypro or PVDF for Superior Piping

Integrity and Maximum Chemical Resistance.

Gearbox: Sealed Gearbox and Sealed Shaft for Maximum Protection.

Motors: Chem-Duty, Wash Down Duty, Inverter-Duty, 1000:1

Turndown Motors with SS Shafts, Moisture Resistant Windings

and Epoxy Coating.

Containment: Gasketed Body for Primary Leak Containment and Safety.

Leak Detection: Tube Leak Detection with Leak Containment.

Base: Corrosion Resistant HDPE

