

1.5 - 2.0 HP



PUMPEX P 601



P 601 W *)
Rating (HP): 1.5
Voltage (V): Dual 115/230
Full Load (A): 13.0/6.5

P 601 N *)
Rating (HP): 1.5
Voltage (V): Dual 230/460 or 575
Full Load (A): 4.4/2.2 or 1.8
Speed: 3400 rpm
Power cable: 65 ft
Discharge connection: NPT 2" (standard), 3" Plain 1½", 2", 2½", 3"

Weight (excl. cable): 35 lb
Strainer size: 1/4" x 5/8"

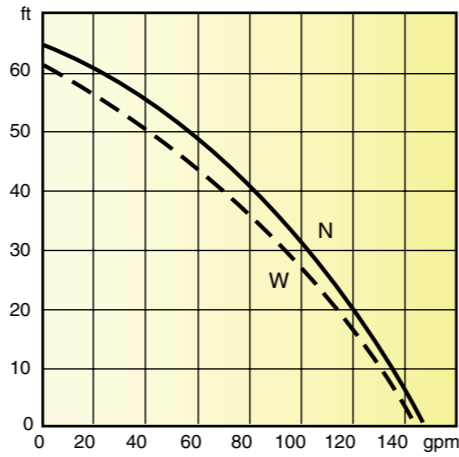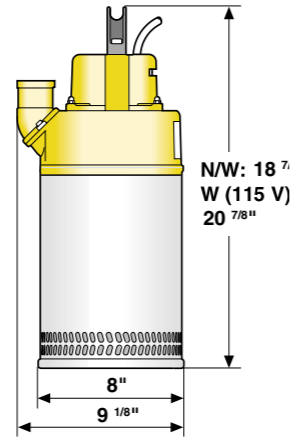



PUMPEX P 801



P 801 W *)
Rating (HP): 2.0
Voltage (V): 230
Full Load (A): 8.9

P 801 N *)
Rating (HP): 2.0
Voltage (V): Dual 230/460 or 575
Full Load (A): 5.4/2.7 or 2.2
Speed: 3400 rpm
Power cable: 65 ft
Discharge connection: NPT 2" (standard), 3" Plain 1½", 2", 2½", 3"

Weight (excl. cable): W: 40 lb, N: 36 lb
Strainer size: 1/4" x 5/8"

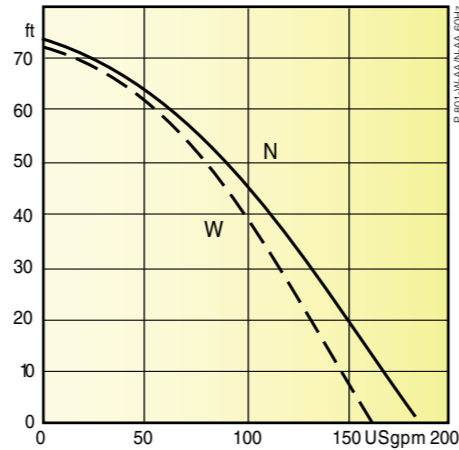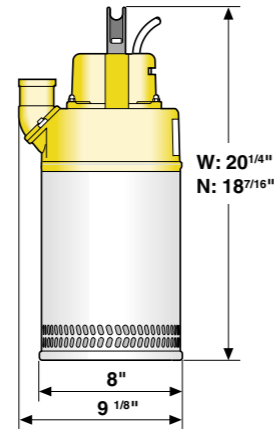


PUMPEX P 601, P 801

Pump with built in float switch.

P 601 115/230V, P 801 230V single phase and P 601, P 801 230/460V three phase are available with built in float switch when automatic start and stop is required.

A typical installation for automatic level control is in narrow sumps where the level of the sump is changing quickly.

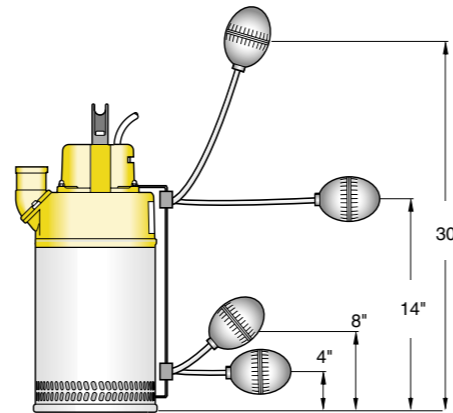

Submersible drainage pumps certified according to EPD®

Environmental Product Declaration

Certified Environmental Product Declaration, EPD, is a new system to present a products environmental impact during its entire life cycle. All the environmental product declarations are based on product specific life cycle analyses, conducted in accordance with the ISO14040-series.

Reduce the Environmental Impact (LCA):

- 1) Select the right size pump for the application.
- 2) Use at optimum efficiency.
- 3) Keep a high degree of efficiency by replacing wear parts.



Environmental Product Declaration
Certified by SEMKO-DEKRA

2.6 - 15.0 HP



PUMPEX P 1001



P 1001 W
Rating (HP): 2.6
Voltage (V): 230
Full Load (A): 13.4

P 1001 N
Rating (HP): 3.8
Voltage (V): Dual 230/460 or 575
Full Load (A): 10.4/5.2 or 4.2
Speed: 3400 rpm
Power cable: 65 ft
Discharge connection: NPT 3" (standard), 4" Plain 2½", 3", 4"

Weight (excl. cable): 60 lb
Strainer size: 5/16" x 11/16"

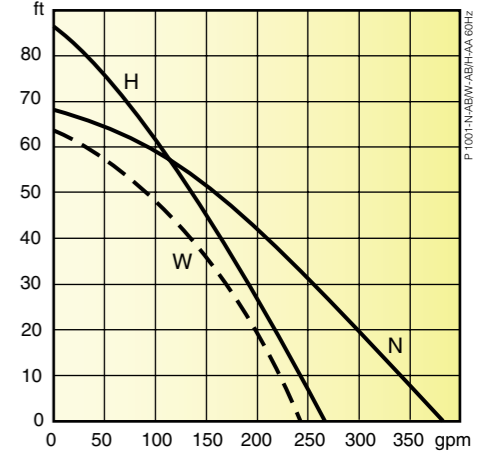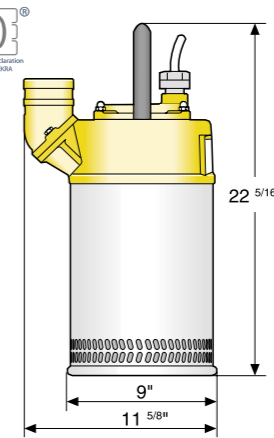



*) Enduro Lining™ available as option (N+H)

PUMPEX P 1501



P 1501 N
Rating (HP): 6.0
Voltage (V): Dual 230/460 or 575
Full Load (A): 14.4/7.2 or 5.8
Speed: 3400 rpm
Power cable: 65 ft
Discharge connection: NPT 3" (standard), 4" Plain 2½", 3", 4"

Weight (excl. cable): 79 lb
Strainer size: 5/16" x 11/16"

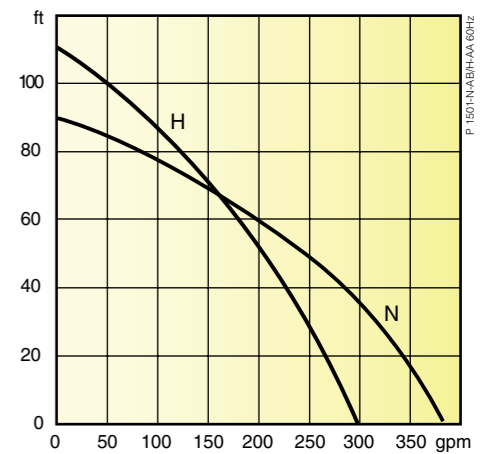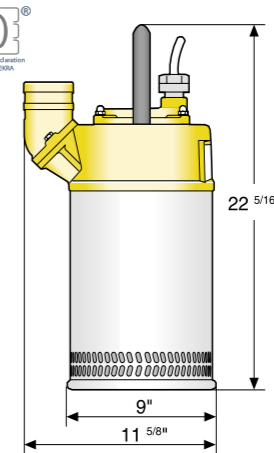



*) Enduro Lining™ available as option (N+H)

PUMPEX P 2001



P 2001 N, [WN]
P 2001 H, [WH]
P 2001 V
Rating (HP): 9.0 [5.6]
Voltage (V): Dual 230/460 or 575 [230]
Full Load (A): 22.0/11.0 or 8.8 [25.0]
Speed: 3400 rpm
Power cable: 65 ft
Discharge connection: NPT 3" (std H), 4" (std N), 6" (std V) Plain 3", 4", 6"

Weight (excl. cable): 110 lb
Strainer size: 5/16" x 11/16"

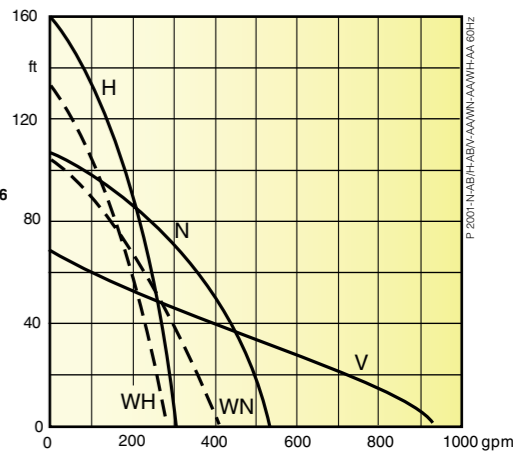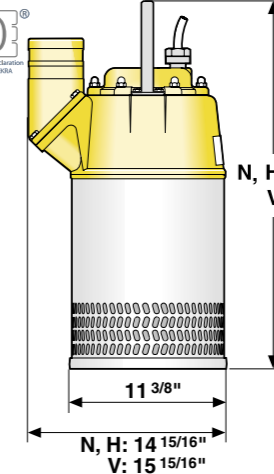

Bottom plate on P 2001V:





*) Enduro Lining™ available as option (N+H)

PUMPEX P 3001




P 3001 N
P 3001 H
P 3001 V
Rating (HP): 15.0
Voltage (V): Dual 230/460 or 575
Full Load (A): 34.0/17.0 or 13.5
Speed: 3400 rpm
Power cable: 65 ft
Discharge connection: NPT 3" (std H), 4"(std N), 6" (std V) Plain 3", 4", 6"

Weight (excl. cable): 154 lb
Strainer size: 5/16" x 11/16"

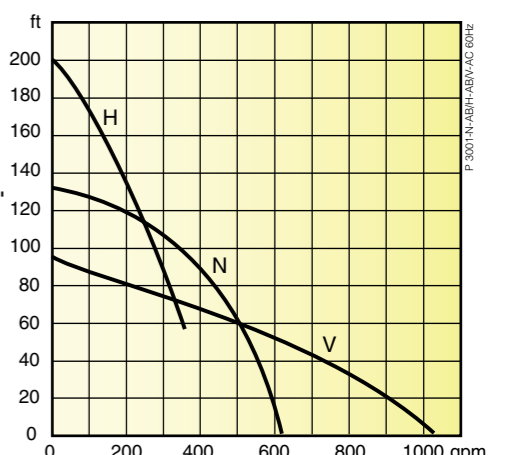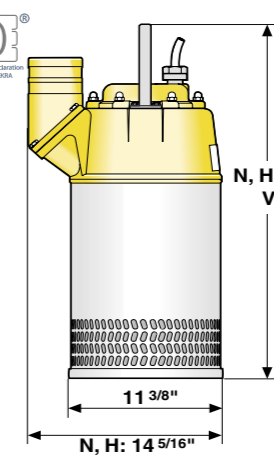

Bottom plate on P 3001V:





*) Enduro Lining™ available as option (N+H)

34.0 - 94.0 HP and Slimline 3.8 HP

PUMPEX PX 12





PX 12 N
PX 12 H
 Rating (HP): 34.0
 Voltage (V): Dual 230/460 or 575
 Full Load (A): 82.0/41.0 or 38.0
 Speed: 3500 rpm
 Power cable: 65 ft
 Discharge connection: NPT 4" (std H), 6" (std N), 8" Plain 4", 6", 8"
 Weight (excl. cable): 342 lb
 Strainer size: 5/16" x 1 5/16"

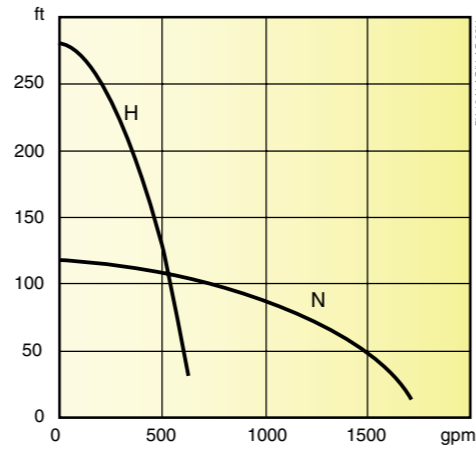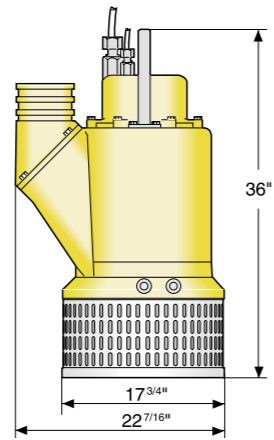

**) Enduro Lining™ available as option (H)*



PUMPEX PX 22

PX 22 N
PX 22 H
 Rating (HP): 55.0
 Voltage (V): Dual 230/460 or 575
 Full Load (A): 132.0/66.0 or 53.0
 Speed: 3450 rpm
 Power cable: 65 ft
 Discharge connection: NPT 4" (std H), 6", 8" (std N) Plain 4", 6", 8"
 Weight (excl. cable): 595 lb
 Strainer size: 5/16" x 1 5/16"

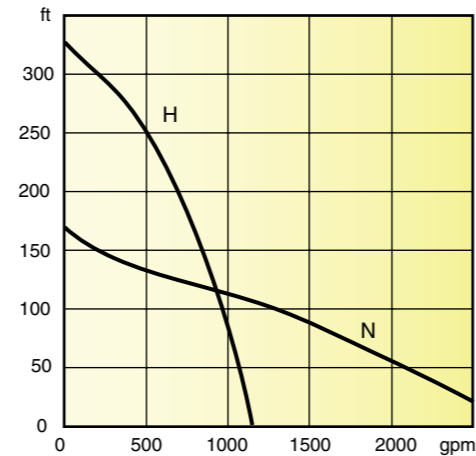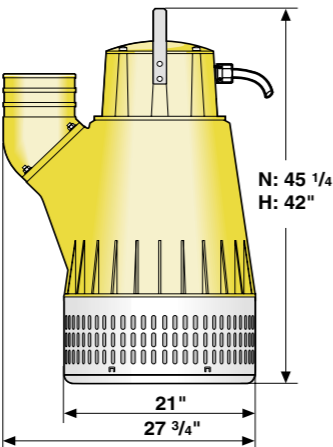

PUMPEX PX 30



PX 30 N
PX 30 H
 Rating (HP): 94.0
 Voltage (V): Dual 230/460 or 575
 Full Load (A): 226.0/113.0 or 91.0
 Speed: 1730 rpm
 Power cable: 65 ft
 Discharge connection: NPT 6" (std H), 8" (std N), 10" Plain 6", 8", 10"
 Weight (excl. cable): 1157 lb
 Strainer size: 1/2" x 2 3/8"

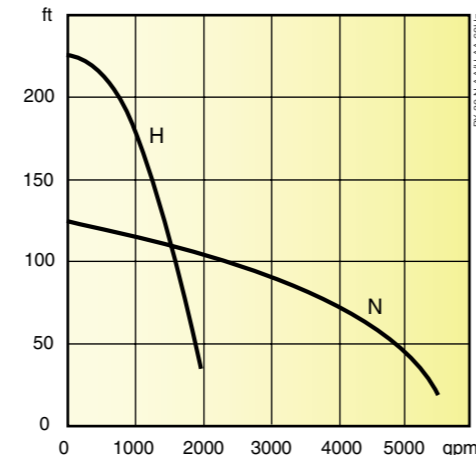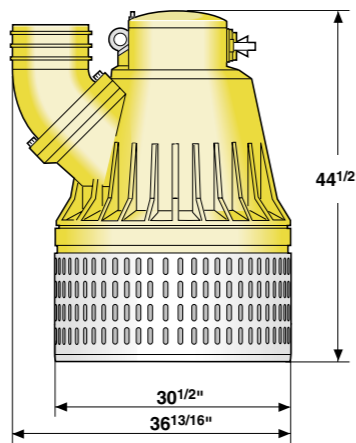

PUMPEX PC 1001



PC 1001 N
PC 1001 H
 Rating (HP): 3.8
 Voltage (V): Dual 230/460 or 575
 Full Load (A): 10.4/5.2 or 4.2
 Speed: 3400 rpm
 Power cable: 65 ft
 Discharge connection: NPT 3"
 Weight (excl. cable): 60 lb
 Strainer size: 5/16" x 11/16"

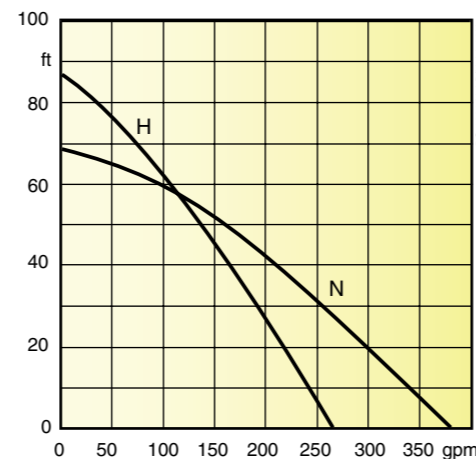
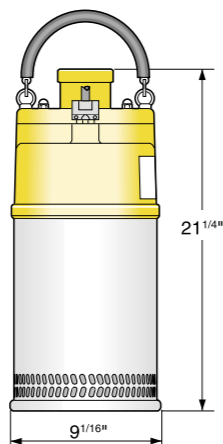


**) Enduro Lining™ available as option (N+H)*

Slimline 6.0 - 15.0 HP

PUMPEX PC 1301



PC 1301 N
PC 1301 H
 Rating (HP): 6.0
 Voltage (V): Dual 230/460 or 575
 Full Load (A): 16.0/8.0 or 6.4
 Speed: 3400 rpm
 Power cable: 65 ft
 Discharge connection: NPT 2" (std H), 3" (std N) Plain 2", 3"
 Weight (excl. cable): 68 lb
 Strainer size: 5/16" x 1 5/16"

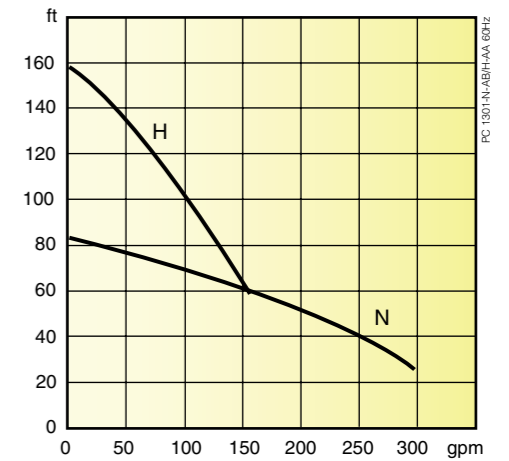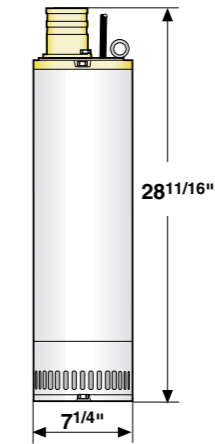

PUMPEX PC 1501



PC 1501 N
PC 1501 H
 Rating (HP): 6.0
 Voltage (V): Dual 230/460 or 575
 Full Load (A): 14.4/7.2 or 5.8
 Speed: 3400 rpm
 Power cable: 65 ft
 Discharge connection: NPT 3"
 Weight (excl. cable): 79 lb
 Strainer size: 5/16" x 11/16"

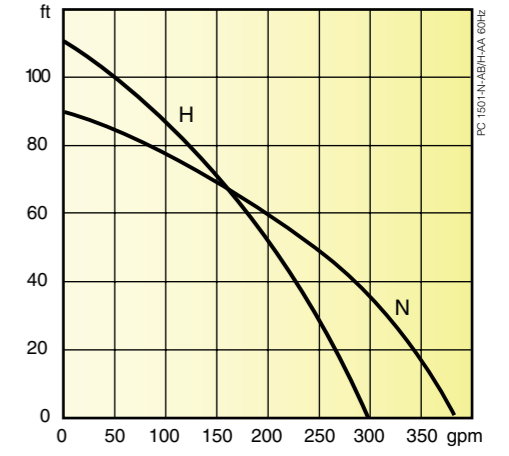
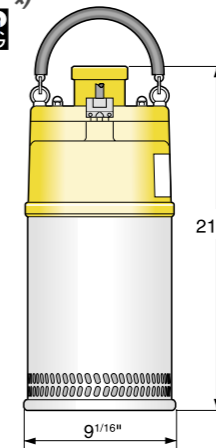


**) Enduro Lining™ available as option (N+H)*

PUMPEX PC 2001



P 2001 N, [WN]
P 2001 H, [WH]
P 2001 V
 Rating (HP): 9.0 [5.6]
 Voltage (V): Dual 230/460 or 575 [230]
 Full Load (A): 22.0/11.0 or 8.8 [25]
 Speed: 3400 rpm [3310]
 Power cable: 65 ft
 Discharge connection: NPT 3" (std H), 4" (std N, V)
 Weight (excl. cable): 110 lb
 Strainer size: 5/16" x 11/16"

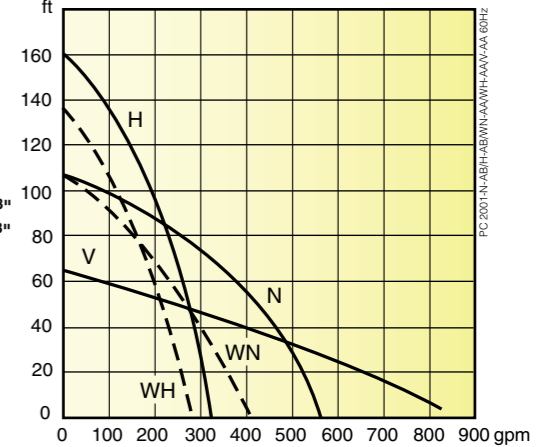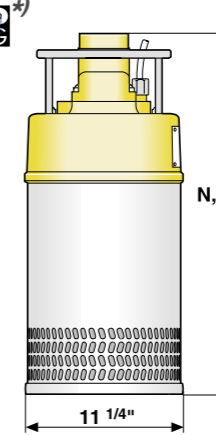



Bottom plate on PC 2001V:

**) Enduro Lining™ available as option (N+H)*

PUMPEX PC 3001



PC 3001 N
PC 3001 H
PC 3001 V
 Rating (HP): 15.0
 Voltage (V): Dual 230/460 or 575
 Full Load (A): 34.0/17.0 or 13.5
 Speed: 3400 rpm
 Power cable: 65 ft
 Discharge connection: NPT 3" (std H), 4" (std N, V)
 Weight (excl. cable): 154 lb
 Strainer size: 5/16" x 11/16"

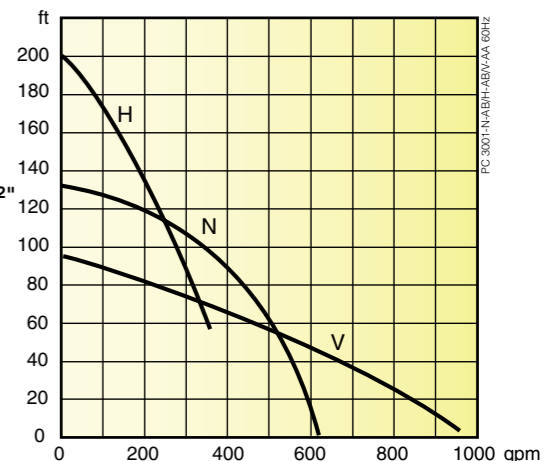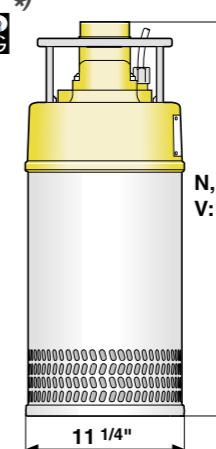

Bottom plate on PC 3001V:


**) Enduro Lining™ available as option (N+H)*

Klipp,
klipp!
Här
tar
sidan
slut.

Slimline

OPTIONS AND ACCESSORIES

Starter box with float switch




When a start and stop level is required, this can be provided with starter box and float switch.

For separate D.O.L or Star-Delta starter box consult Pumpex.

SoftDrive™

SoftDrive™ is available built in on P 2001, P 3001 and PX 12. The Pumpex SoftDrive™ concept reduces starting current dramatically, providing a smooth operation for both the power net and pump equipment.


Eliminates water hammering effects when the pump is stopped, allowing the pump to smoothly ramp down. Intelligent protection built into the pump, ensuring correct impeller rotation, motor protection and main power check at start up.



Hose, couplings, clamp

Flexible reinforced discharge hose is available with inner diameter 1", 1 1/2", 2", 2 1/2", 3", 4", 6", 8".


Hose clamp and couplings for flexible hose are available with same diameter.

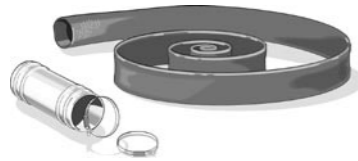

Electronic motor supervision

FSV 82, electronic motor protector. The motor protector prevents the pump from starting in the wrong direction of rotation.


This protection device will also trip the pump in event of phase failure. The FSV 82 features protection against automatic restart in event that the pump has tripped due to over heating.



Zinc anodes


The pumps can be equipped with zinc anodes for protection of the aluminum parts against galvanic corrosion, e.g. when pumping saline or brackish water.

The zinc anodes are fitted on the bottom plate and the main cover of the pump.



Series connection

Series connections are available for all drainage pumps. The series connections have a center inlet for hose connection.

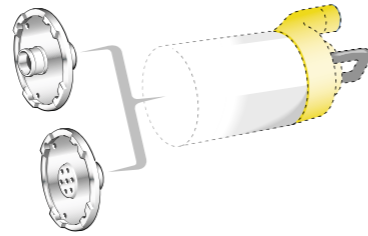


Bottom suction adapter

On pump types P 601, P 801 and P 1001 the standard bottom plate may be replaced by a bottom suction adapter. A basement floor or a tank can be pumped practically dry with this adapter.

Surface protection coating

Pumpex offers an environmentally friendly surface protection where casted parts are coated with a 3-layer surface coating for high corrosion resistance.

For extreme conditions zinc anodes can be added to the 3-layer surface protection coating.



Heavy duty seal

All Pumpex P/PC 1001- 3001 and SP20-80 can be fitted with a "Heavy Duty" primary seal as an option. The maintenance period can be prolonged dramatically when the pump is used under extreme conditions to handle special medias.


The Heavy Duty seal has a totally encapsulated rotating part.



Polyurethane

Pumpex offers **Enduro Lining™**, a solution where the diffusers and wear discs are coated with polyurethane. Pumpex impellers are designed with a full upper shroud, which improves the wear resistance of the impeller and eliminates the need of polyurethane on the oil casing cover.

Polyurethane coated wear parts are mainly used in extremely abrasive applications such as mining.



Polyurethane coated diffusers and wear discs are available as an option on P/PC 1001-1501, P/PC 2001-3001 and on PX 12.

WWW.PUMPEX.COM

PUMPEX SALES
P.O. Box 5207
Rökerigatan 20
SE-121 18 JOHANNESHOV
Sweden

Tel: +46 8 725 49 30
Fax: +46 8 659 33 14
E-mail: info@pumpex.com

PUMPEX PRODUCTION
Åsgatan 3
SE-914 32 NORDMALING
Sweden

Tel: +46 930 395 00
Fax: +46 930 395 19
E-mail: info@pumpex.com



PUMPEX P 601 - 3001, PX 12 - 30, PC 1001 - 3001



SUBMERSIBLE DRAINAGE PUMPS

60 HZ

PUMPEX



No suction lift limitations

Pumpex drainage pumps are submersible to 65 ft depth and have no suction lift limitations. This is superior to self-priming pumps due to the fact that the pump is installed in the pit; the pump does not need to be moved with varying water levels, there are no suction hoses, and there are no vacuum priming issues.

High reliability

Double mechanical shaft seal in oil bath (silicon carbide on silicon carbide in the primary seal) for long life. Rigid stainless steel shaft with lower double angular contact ball bearings for vibration-free operation. Large strainer area minimizes the risk of clogging.

Trouble free and safe handling

Pumpex drainage pumps are equipped for immediate use. The low weight, encapsulated motor and no external moving parts makes installation and operation easy and safe.

High wear resistance

Impeller in high chrome alloy steel with a hardness of 60 Rc. Adjustable wear parts covered with oil resistant nitrile rubber to secure a long lifetime with high efficiency. For extreme conditions choose Pumpex exclusive **Enduro Lining™** polyurethane coated wear parts.

Plug-in start with motor protection

Built-in contactor, capacitor (Single Phase) and thermal protectors in the stator windings protects the motor and features an automatic restart function.

High flexibility

The pump can operate in every position, vertical, horizontal or even upside down. The pump can easily be converted between standard, high head or high volume versions.

Corrosion resistant

Outer casing, rotor shaft and hardware are made of stainless steel.

Can run dry

Double outer casing and good heat convection make it possible to run the pump dry or in a snore condition.

Easy service and maintenance

Common philosophy through the complete range with modular design and interchangeable spare parts. (For example identical shaft seals for P 601/P 801, P 1001-P 3001, PX 12/PX 22)

- Easy access to separate sealed electrical junction box.
- Easy to adjust or replace hydraulic wear parts.

Environmentally safe

The oil housing is filled with environmentally safe white oil. Non toxic coatings are used.