

Cornell RB Series

Standard Features

- Hot Dip Galvanized Trailers and Skids
 - Radiator Enclosure
 - Battery Box
 - Wheels
- Zinc Plated Jacks
- Tier2 Certified Engines
 - Perkins and John Deere
- DOT LED lights
- Electric Brakes with Safety breakaway
- Locking Battery Box

Pump Features

- External hydraulic balance line
- Double volute system
- Standard configuration is packing; Mechanical seal optional
- Versatile flow and pressure range
- Low NPSH
- Low maintenance
- High performance

Technical


- Pump sizes from 3" to 6"
- Flows from 100 gpm to 4,400 gpm
- Pressures from 50 psi to 130 psi
- Trailer-mounted pump and engine
- 24-hour minimum capacity fuel tank
- Direct coupled to engine



Material Specifications

- Rigid, heavy-walled construction
- Register fits for positive alignment
- Fully-machined, SAE 40 bronze impeller with double curvature vanes
- Replaceable, recessed bronze wear rings
- Suction / discharge flanges ANSI 125#

CORNELL PUMP CURVE

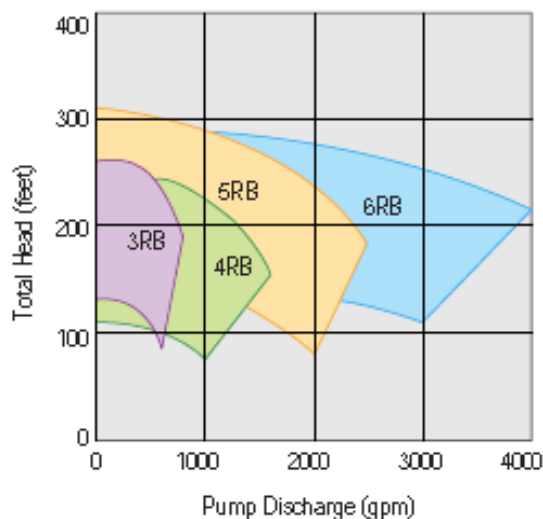

For all RB series pump curves, visit www.powerprime.com



POWER PRIME™ PUMPS

P.O. Box 2248
 Bakersfield CA 93303
 800 647-7246
 661-399-9058
 FAX 661•399-3374
www.powerprime.com
 sales @ powerprime.com

Power Prime™ is a registered trademark of Western Oilfields Supply Company. Features and Specifications are subject to change without notice.