

Power Prime™ PUMPS



Model DV-300i

Standard Features

- Hot Dip Galvanized Skids
 - Radiator Enclosure
 - Battery Box
- Emissions Certified Engines
 - Perkins, John Deere and Caterpillar
- Locking Battery Box

Size 12" x 12"

Pump Features

- Solids handling capabilities to 3.5" diameter maximum
- Continuous self priming
- Runs dry unattended
- Suction lift to 28ft.
- Skid-mounted




Technical

- Pedestal-mounted and flex-coupled to a diesel engine
- 12 volt, electric start with control panel
- Skid-mounted with lifting bale
- 250-gallon capacity integral fuel tank
- Skid plumbed for connection to external fuel tank
- Compressor/Venturi automatic priming system
- Electric drive option available
- Sound attenuated option available

Material Specifications

- Standard build – Ductile Iron volute, 316 Stainless Steel open impeller and replaceable wear plates
- Pump shaft 431 stainless steel
- Mechanical Seal Solid silicon carbide mating faces Oil-bath lubrication for dry running
- Suction / discharge flanges ANSI 150# FF.

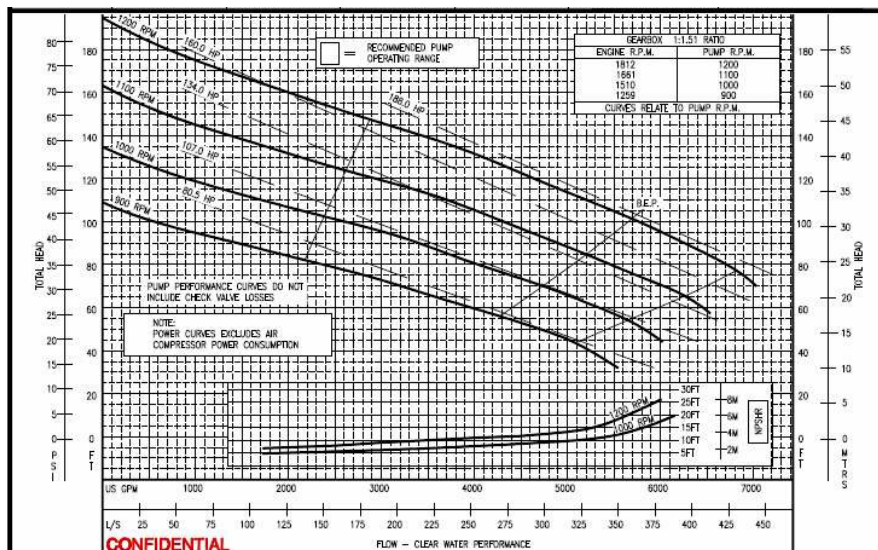

POWER PRIME™ PUMPS

P.O. Box 2248
 Bakersfield CA 93303
 800 647-7246
 661-399-9058
 FAX 661•399-3374
www.powerprime.com
sales@powerprime.com

Power Prime™ is a registered trademark of Western Oilfields Supply Company. Features and Specifications are subject to change without notice.