

# Power Prime™ PUMPS



## Model XH-150

Size 8" x 6"

### Standard Features

- Hot Dip Galvanized Skids
  - Radiator Enclosure
  - Locking Battery Boxes
- Emissions Certified Caterpillar Engine

### Pump Features

- Solids handling capabilities to 1.75" diameter maximum
- Continuous self priming
- Runs dry unattended
- Suction lift to 28'
- Skid mounted
- Stainless Steel Construction




### Technical

- Pedestal-mounted and flex-coupled to diesel engine
- 12 volt, electric start with auto start control panel
- Skid-mounted with optional lifting bale
- Overnight capacity fuel tank
- Pre-plumbed for nurse tank
- Compressor/Venturi automatic priming system

### Material Specifications

- Standard Build – 316 Stainless Steel volute, 5 vane enclosed impeller and replaceable wear plates
- Pump Shaft  
431 Stainless Steel
- Mechanical Seal  
Cartridge type mechanical seal with stainless steel metallic parts, with viton elastomers and silicon carbide faces.  
Oil-bath lubrication for dry running
- Suction / discharge flanges ANSI 300# FF

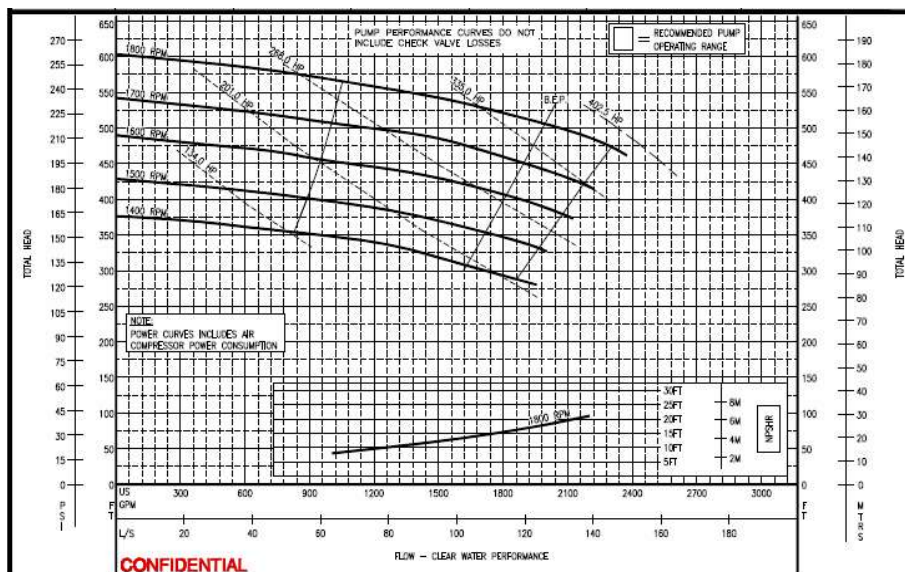

### POWER PRIME™ PUMPS

P.O. Box 2248  
Bakersfield CA 93303  
800 647-7246  
661-399-9058  
FAX 661•399-3374  
www.powerprime.com  
sales @ powerprime.com

Power Prime™ is a registered trademark of Western Oilfields Supply Company. Features and Specifications are subject to change without notice.