



ITT

Wastewater

Red Jacket Water Products

2EP Submersible Effluent Pump



FEATURES

- **Impeller:** Cast iron, semi-open, non-clog with pump-out vanes for mechanical seal protection. Balanced for smooth operation.
- **Casing:** Cast iron volute type for maximum efficiency. 2" NPT discharge.
- **Mechanical Seal:** Silicon carbide vs. silicon carbide sealing faces. Stainless steel metal parts, BUNA-N elastomers.
- **Shaft:** Corrosion-resistant, stainless steel. Threaded design. Locknut on all models to guard against component damage on accidental reverse rotation.
- **Power Cord:** Standard cord is 20' long.
- **Fasteners:** 300 series stainless steel.
- **Operation:** Capable of running dry without damage to components.
- **Capacities:** up to 140 GPM.
- **Total heads:** up to 128 feet TDH.
- **Temperature:** 104°F (40°C) continuous; 140°F (60°C) intermittent.
- **Options available on this Series** are: Silicon bronze (unleaded) impellers, tungsten carbide shaft seals and longer power cords in 30', 50' and 100' lengths. Option prices and order suffixes are found in the Price Book.



Red Jacket Water Products is a brand of ITT Corporation.

www.redjacketwaterproducts.com

Engineered for life

AGENCY LISTINGS





Tested to UL 778 and
CSA 22.2 108 Standards
By Canadian Standards Association
File #227637



ITT

Red Jacket Water Products Wastewater

PERFORMANCE CURVES

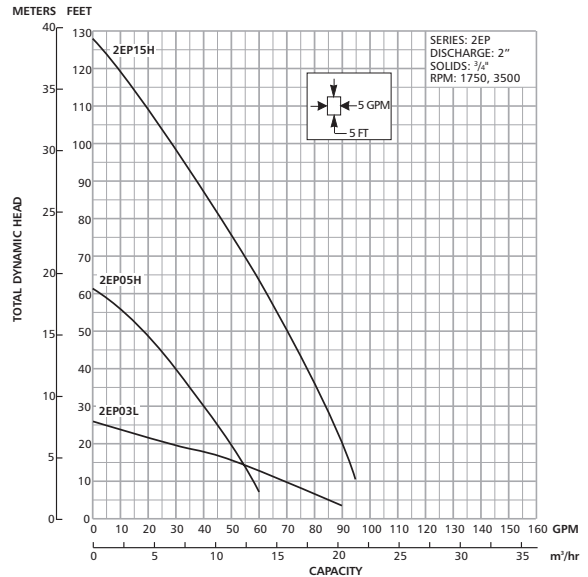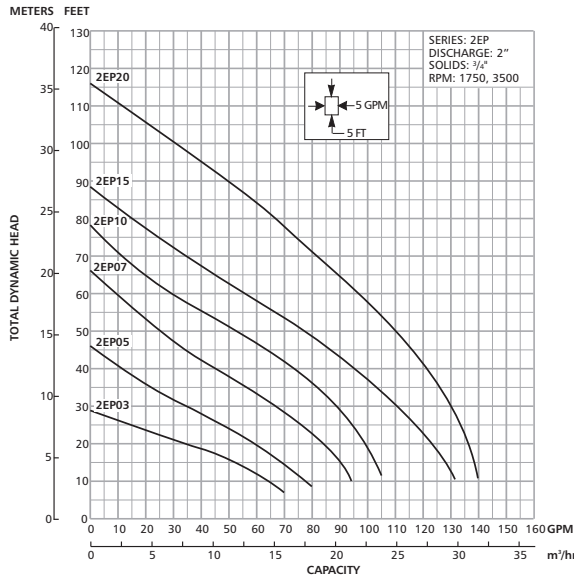

MOTOR FEATURES

Oil-Filled: Fully submerged in high-grade turbine oil for lubrication and efficient heat transfer.

Class B insulation.

Single phase:

Built-in overload with automatic reset.

All single phase models feature capacitor start motors for maximum starting torque.

1/3-1 HP – 16/3 SJTOW with 115V or 230V molded NEMA three prong grounding plug.

1 1/2 and 2 HP – 14/3 STOW with bare leads.

Three phase:

Overload protection must be provided in starter unit.

1/2-2 HP – 14/4 STOW with bare leads.

Designed for Continuous Operation: Pump ratings are within the motor manufacturer's recommended working limits, can be operated continuously without damage when fully submerged.

Bearings: Upper and lower heavy duty ball bearing construction.

Power Cable: Severe duty rated, oil and water resistant. Epoxy seal on motor end provides secondary moisture barrier in case of outer jacket damage and to prevent oil wicking. Standard cord is 20'. Optional lengths are available.

O-ring: Assures positive sealing against contaminants and oil leakage.

PERFORMANCE RATINGS (gallons per minute)

Order No.	2EP03L	2EP03	2EP05	2EP07	2EP10	2EP15	2EP05H	2EP15H	2EP20
HP	1/3	1/3	1/2	3/4	1	1 1/2	1/2	1 1/2	2
RPM	1750	1750	3500	3500	3500	3500	3500	3500	3500
Total Head Feet of Water	5	86	—	—	—	—	—	—	—
	10	70	63	78	94	—	58	95	—
	15	52	50	70	90	103	128	53	93
	20	27	35	60	83	98	123	49	90
	25	5	15	48	76	94	117	45	87
	30	—	—	35	67	88	110	40	83
	35	—	—	20	57	82	103	35	80
	40	—	—	—	45	74	95	30	77
	45	—	—	—	35	64	86	25	74
	50	—	—	—	25	53	77	—	70
	55	—	—	—	—	40	67	—	66
	60	—	—	—	—	30	56	—	63
	65	—	—	—	—	20	45	—	58
70	—	—	—	—	—	35	—	55	
75	—	—	—	—	—	25	—	51	
80	—	—	—	—	—	—	—	47	
90	—	—	—	—	—	—	—	37	
100	—	—	—	—	—	—	—	28	


MOTOR INFORMATION

Single phase:

- Capacitor start
- Class "B" insulation
- Built-in automatic reset overload
- Available ratings:
 - 115 Volt – .33-.5 HP
 - 208 Volt – .33-1.5 HP
 - 230 Volt – .33-2 HP

Three phase:

- Overloads required in control panel
- Available ratings:
 - 200 Volt – .5-2 HP
 - 230 Volt – .5-2 HP
 - 460 Volt – .5-2 HP
 - 575 Volt – .5-2 HP




ITT

Red Jacket Water Products Wastewater

MODEL INFORMATION

Order Number	HP	Phase	Volts	RPM	Impeller Dia. (in.)	Max. Amps	LRA	KVA Code	Full Load Motor Eff.	Resistance		Wt. (lbs.)			
										Start	Line-Line				
2EP0311L	0.33	1	115	1750	5.38 (L)	10.7	30.0	M	54	11.9	1.7	56			
2EP0318L			208			6.8	19.5	K	51	9.1	4.2				
2EP0312L			230			4.9	14.1	L	53	14.5	8.0				
2EP0311			115		10.7	30.0	M	54	11.9	1.7					
2EP0318			208		6.8	19.5	K	51	9.1	4.2					
2EP0312			230		4.9	14.1	L	53	14.5	8.0					
2EP0511	0.5	1	115	3450	3.56	14.5	46.0	M	54	7.5	1.0	60			
2EP0518			208			8.1	31.0	K	68	9.7	2.4				
2EP0512			230			7.3	34.5	M	53	9.6	4.0				
2EP0538			3			200	4.9	22.6	R	68	NA		3.8		
2EP0532						230	3.3	18.8	R	70	NA		5.8		
2EP0534						460	1.7	9.4	R	70	NA		23.2		
2EP0537		575	1.4		7.5	R	62	NA	35.3						
2EP0511H		1	115		14.5	46.0	M	54	7.5	1.0					
2EP0518H			208		8.1	31.0	K	68	9.7	2.4					
2EP0512H			230		7.3	34.5	M	53	9.6	4.0					
2EP0538H			3		200	4.9	22.6	R	68	NA	3.8				
2EP0532H					230	3.6	18.8	R	70	NA	5.8				
2EP0534H					460	1.8	9.4	R	70	NA	23.2				
2EP0537H		575	1.5		13.1	R	62	NA	35.3						
2EP0718		0.75	1		208	3450	4.06	11.0	31.0	K	68		9.7	2.4	70
2EP0712					230			10.0	27.5	J	65		12.2	2.7	
2EP0738			3		200			6.2	20.6	L	64		NA	5.7	
2EP0732					230			5.4	15.7	K	68		NA	8.6	
2EP0734	460			2.7	7.9			K	68	NA	34.2				
2EP0737	575			2.2	9.9			L	78	NA	26.5				
2EP1018	1	1	208	3450	4.44	14.0	59.0	K	68	9.3	1.1	80			
2EP1012			230			12.5	36.2	J	69	10.3	2.1				
2EP1038		3	200			8.1	37.6	M	77	NA	2.7				
2EP1032			230			7.0	24.1	L	79	NA	4.1				
2EP1034			460			3.5	12.1	L	79	NA	16.2				
2EP1037			575			2.8	9.9	L	78	NA	26.5				
2EP1518	1.5	1	208	3450	4.56	17.5	59.0	K	68	9.3	1.1	80			
2EP1512			230			15.7	50.0	H	68	11.3	1.6				
2EP1538		3	200			10.6	40.6	K	79	NA	1.9				
2EP1532			230			9.2	31.7	K	78	NA	2.9				
2EP1534			460			4.6	15.9	K	78	NA	11.4				
2EP1537			575			3.7	13.1	K	75	NA	16.9				
2EP1518H		1	208		17.5	59.0	K	68	9.3	1.1					
2EP1512H			230		15.7	50.0	H	68	11.3	1.6					
2EP1538H			3		200	10.6	40.6	K	79	NA	1.9				
2EP1532H					230	9.2	31.7	K	78	NA	2.9				
2EP1534H					460	4.6	15.9	K	78	NA	11.4				
2EP1537H					575	3.7	13.1	K	75	NA	16.9				
2EP2012	2	3	230	3450	5.38	18.0	49.6	F	78	1.1	3.2 / 1.2	83			
2EP2038			200			12.0	42.4	K	78	NA	1.7				
2EP2032			230			11.6	42.4	K	78	NA	1.7				
2EP2034			460			5.8	21.2	K	78	NA	6.6				
2EP2037			575			4.7	16.3	L	78	NA	10.5				

Specifically designed for the following uses: Homes, farms, trailer courts, motels, schools, hospitals, industry, effluent systems.





ITT

Wastewater


DIMENSIONS

(All dimensions are in inches. Do not use for construction purposes.)

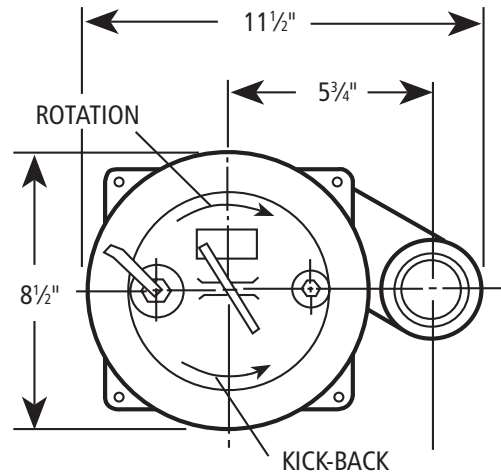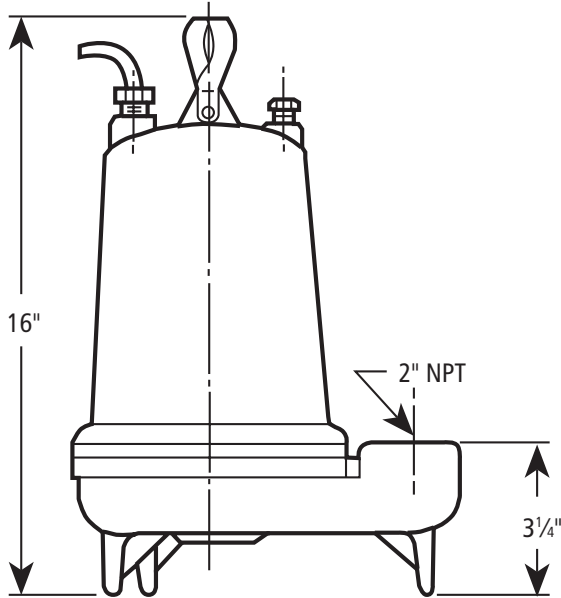

COMPONENTS

Description	Item No.
1	Impeller
2	Casing
3	Silicon carbide vs. silicon carbide mechanical seal
4	Shaft
5	Motor
6	All ball bearing heavy duty design
7	Power cable
8	O-ring

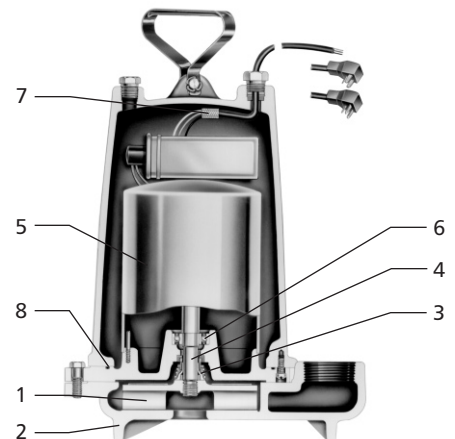

Red Jacket Water Products is a licensed trademark. The ITT Engineered Blocks Symbol is a registered trademark and tradename of ITT Corporation.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

BRJ2EP R2 September, 2007

© 2007 ITT Corporation

Engineered for life