


Roper Pumps

5600
Series

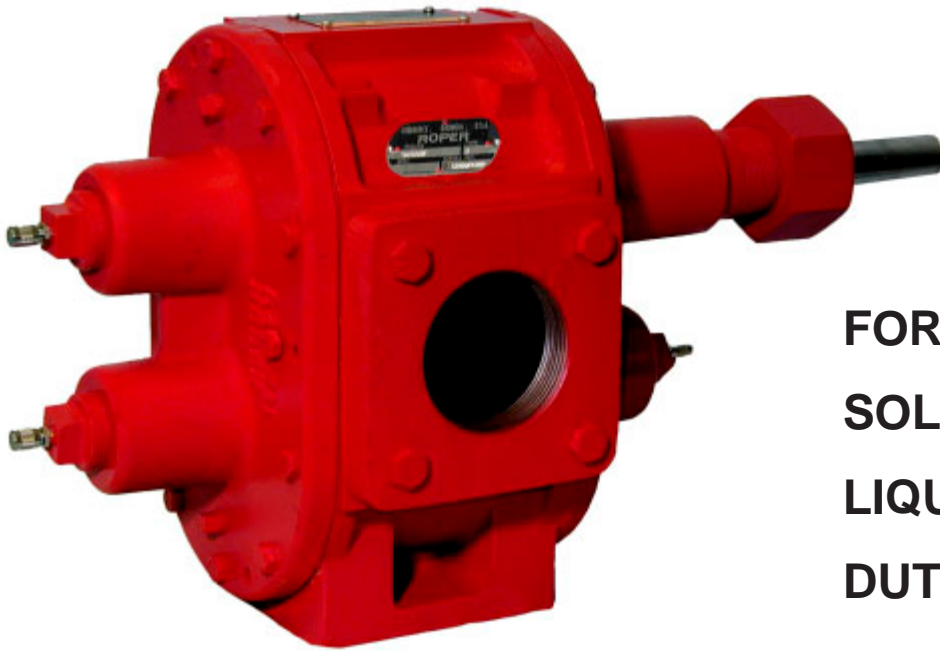

FOR YOUR HIGH
SOLID & HEAVY
LIQUID TRANSFER
DUTIES

EXTREME SERVICE




The leading force behind liquids.

Applications

- Oil field service
- Brine and Raw water
- Sludges and slurry
- Waste oils, Tallow, etc.
- Sealant coats
- Molasses feeds
- Fertilizers
- Paper pulps

Features

- Reversible rotation and flow
- Interchangeable parts with Bowie's 3300
- Easy maintenance
- External greasing
- Latest rubber technology
- 3" pump size
Weight with flanges is approximately 142 lbs

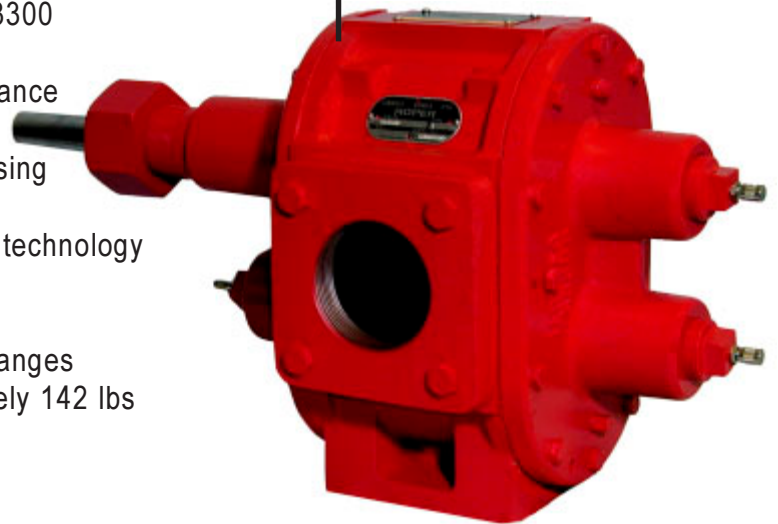



Roper Pump Company

P.O. Box 269 • Commerce, GA 30529
 Toll Free: 1-800-876-9160
 Tele: 706-335-5551 • Fax: 706-335-5490
 sales@roperpumps.com

Visit Us On The WorldWide Web
www.roperpumps.com

5600 Series

Pump Model	Theoretical Capacity	Maximum Speed	Maximum Flow at Maximum Speed	Maximum Temperature	Maximum Pressure	NPT Ports
5658	0.580 GPR	400 RPM	232.0 GPM (at 10 psi)	160°F	100 PSI (7 Bar)	3"

Materials of Construction

Housing	Gears	Bearings	Shaft	Seal
Cast Iron	Nitrile Covered	Bronze	Steel	Packing

Dimensional Chart and Diagram (Inches)

