



SP V 12TW27A RO-VD/L



SP V 12FW30A RO-DV-L

Product Features

- oil free
- maintenance free
- very low vibrations
- very low noise
- small dimensions
- lightweight
- self priming

Applications

- Industrial Applications
- Medical Applications
- Laboratory and Analytical Applications
- cooling and heating
- cleaning



Schwarzer
Precision


Steeler Strasse 477 • 45276 Essen • Germany
Phone: +49 201 31697-0 • Fax: +49 201 31697-29
e-mail: info@schwarzer.com • <http://www.schwarzer.com>



Designation	SP V 12TW27A RO-VD/L	SP V 12FW30A RO-DV-L
Operating Voltage* Art.No.	12 Vdc 7k73010	12 Vdc 7k73091
Hydraulic Performance (measured with water)		
Free Flow [ml/min]	300	600
Flow at 100 mbar [ml/min]	295	570
Max Press. Height [m H ₂ O]	13,0	12,0
We do not recommend to exceed 1,0 m Water Column Pressure !		
Max Vacuum (dry) [mbar]	300	400
Max Suction Height (filled with water) [m H ₂ O]	-3,5	-4,5
Power Consumption		
Motor Type	standard optional	Iron Core DC -
max. current [mA]	460	400
Construction		
Pump Body / Head Diaphragm Valves		ABS CR NBR
Weight [g]	62	92

* other voltages on request


Performance Curves

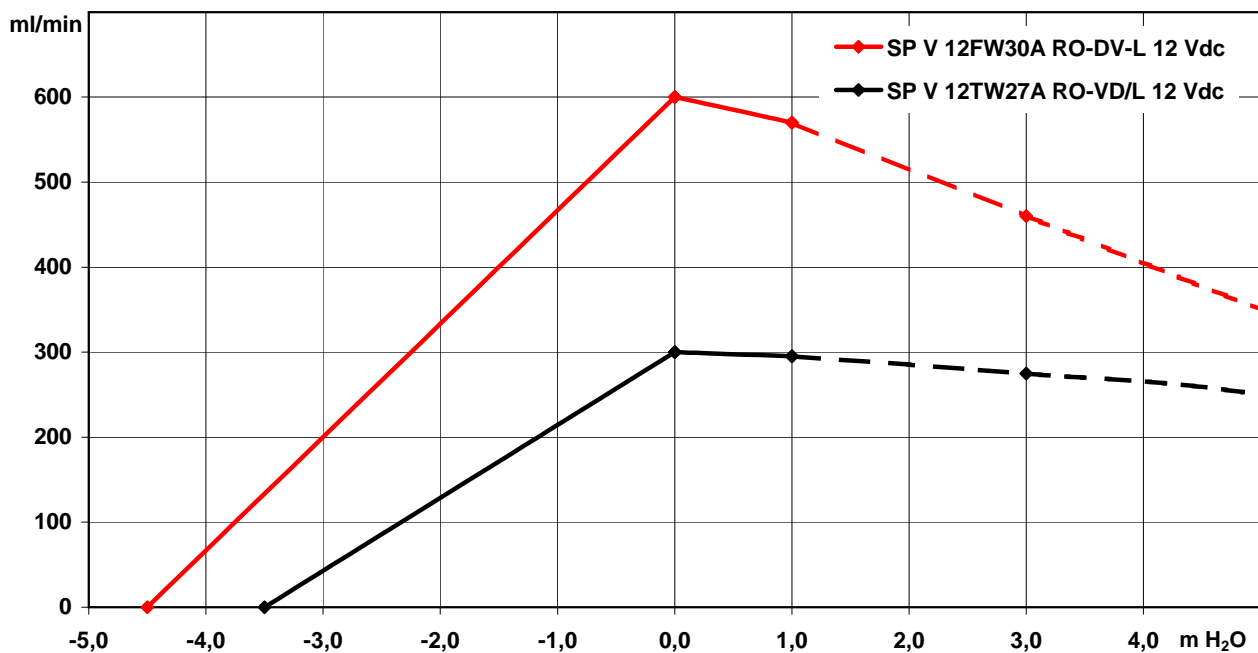

Steeler Strasse 477 • 45276 Essen • Germany
 Phone: +49 201 31697-0 • Fax: +49 201 31697-29
 e-mail: info@schwarzer.com • http://www.schwarzer.com



SP V 12TW27A RO-VD/L

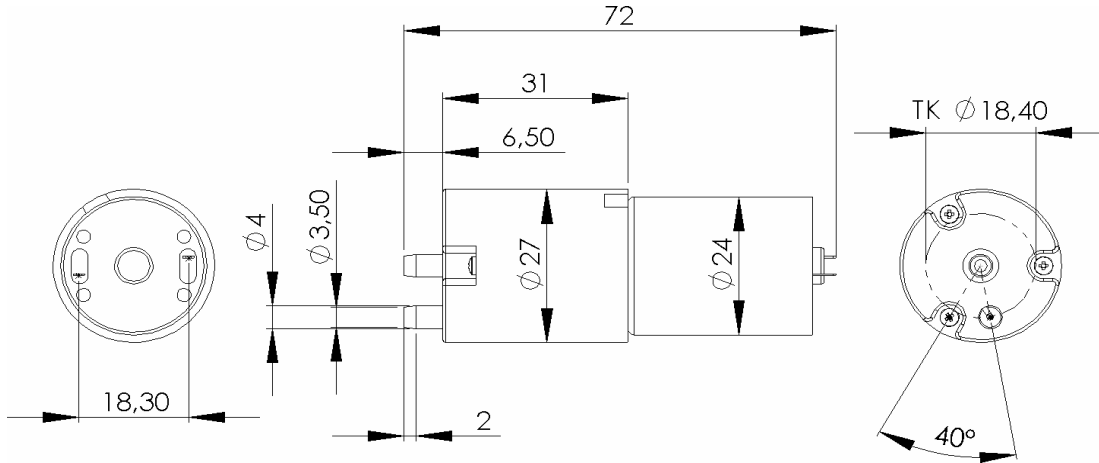

SP V 12FW30A RO-DV-L

