

KS RANGE SUMP PUMPS



- Extensive stainless steel model range, AISI 304
- Lightweight, compact design
- Fast draining of cellars, excavations and swimming pools
- Full portable with carrying handle
- Available with automatic float switch
- Designed and build for continuous duty operation
- Double mechanical seal with oil chamber for enhanced durability

KS RANGE SUMP PUMPS

Field of applications

Smedegaard KS sump pumps is a comprehensive range of submersible drainage pumps, offering a complete solution for the pumping of clean, dirty or semi-dirty waters. They are used for emptying plantroom sumps, cellars, excavations and swimming pools. Maximum solid particle size is 10mm. The pumps are designed and built for continuous duty operation – even if the pumps are only partially submerged.

Automatic start/stop function

Pumps in "A" configuration are with automatic float switch. Separate automatic float switch for 3-phase pumps are available.

Accessories

Flexible PVC hose coupling. Additional float switch for alarm signal or external stop/start functions also available.

Technical specifications

Casing/impeller: Stainless steel AISI 304
 Shaft: Stainless steel AISI 420
 Seal KS 2: Double shaft O-ring seal EPDM
 Seal KS 3-9: Double shaft mechanical seal
 Pump side: Tungsten carbide/Ceramic
 Motor side: Graphite/ceramic
 Protection class: KS 2, IP58 KS 3-9, IP 68
 Insulation class: F

Electrical connection:



KS 2 are supplied with 5 m of cable. KS 3-9 have 10m of cable. Built in overload motor protection with automatic reset for all single-phase standard voltage. For three phase version, the user must provide motor protection and start/stop function. The pumps must be connected in accordance with local electrical regulations.

Operating parameters

Max. Temperature: 50°C continuous operation
 Short period: KS 2: 80°C KS 3-9: 90°C
 Max. Solid size: 10 mm
 Max. Immersion: KS 2: 5 m KS 3-9: 10 m
 Sump size: KS 2: 400x400x400 mm
 Sump size: KS 3-9: 600x600x600 mm
 Minimum suction height: 20 mm

Model identification (example)

KS: Sump pump stainless steel
 5: Model size
 A: Automatic (with float switch)
 M: Manual (without float switch)
 1: 1x230V, 50Hz
 3: 3x400V, 50Hz

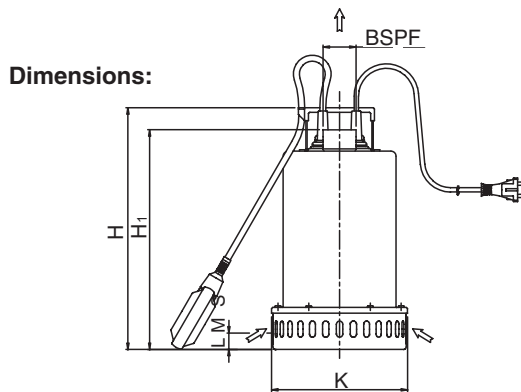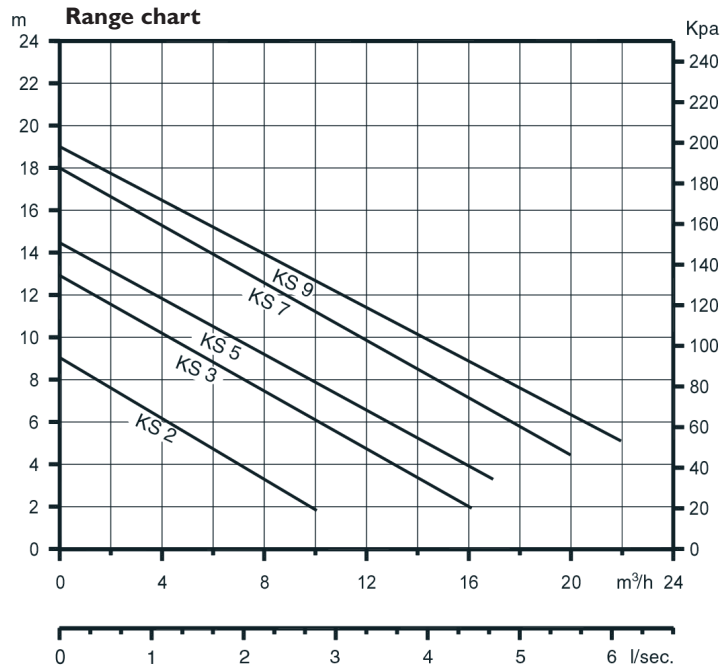

Type	H	H ₁	K	LMS	BSPF	W	Volt	Amp	Kg
KS 2 A-1	260	220	162	20	1¼"	250	1x230	2,2	5,1
KS 2 M-1	260	220	162	20	1¼"	250	1x230	2,2	5,1
KS 3 A-1	352	315	210	20	1½"	550	1x230	4,4	12,0
KS 3 M-3	352	315	210	20	1½"	550	3x400	2,0	12,0
KS 5 A-1	352	315	210	20	1½"	750	1x230	5,6	12,7
KS 5 M-3	352	315	210	20	1½"	750	3x400	2,4	12,7
KS 7 A-1	377	340	210	20	1½"	1100	1x230	7,3	13,8
KS 7 M-3	377	340	210	20	1½"	1100	3x400	3,0	13,8
KS 9 M-3	377	340	210	20	1½"	1500	3x400	3,3	13,5

Digitprint mar 2004 - 999.9999.331

SMEDEGAARD
OF DENMARK

It is SMEDEGAARD's policy to continually improve and develop the product range. We reserve the right to change specifications without prior notice. Whilst every care has been taken to ensure that data is correct, no responsibility can be taken for inaccuracies or misprints.

T. Smedegaard A/S • Sydvestvej 57-59
 DK 2600 Glostrup • Danmark
 Tel +45 43 26 17 50 • Fax +45 43 63 17 66
 info@smedegaard.dk • www.smedegaard.com

Smedegaard Pumps • Unit 7 Barhams Close • Wylde Road
 Bridgwater Somerset • TA6 4 DS • England
 Tel 01278 458686 • Fax 01278 452454
 smedegaardpumps@btinternet.com • www.smedegaard.co.uk

Smedegaard AG • Pumpen- und Motorenbau
 Industriestrasse 15 • CH-5712 Beinwil am See • Schweiz
 Tel +41 62 765 0500 • Fax +41 62 765 0501
 info@smedegaard.ch • www.smedegaard.ch