




# straight centrifugal pumps

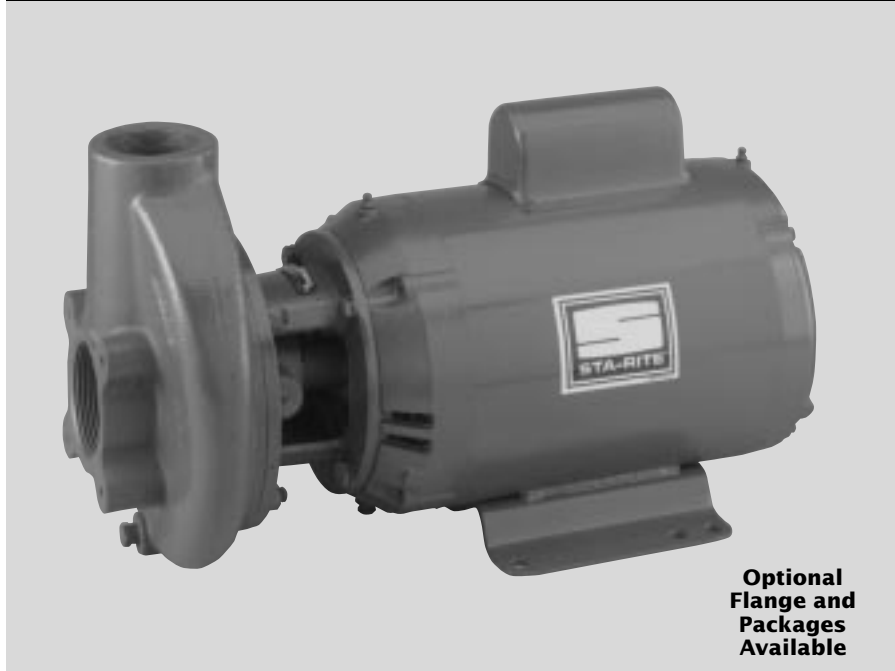

Optional Flange and Packages Available

*These Sta-Rite pumps are compact and lightweight, but rugged. Choose from 3 or 5 HP high head and medium head models. For lower pressures and maximum capacity, medium head models offer heads to 75 feet and capacities to 220 GPM. Where higher pressures are desired, the high head model offers heads to 102 feet and capacities to 260 GPM.*

## APPLICATIONS

- Water systems
- Sprinkling for homes, farms and industry

Contact Customer Service for optional flange and trap packages.

## CC SERIES

### SPECIFICATIONS

- Body** – Close-grained cast iron
- Base** – Heavy gauge steel
- Impeller** – Silicon brass (non-lead)
- Rugged Motors** – 3 to 5 HP, 3450 RPM, open drip-proof, continuous duty rated. 40° C ambient maximum, NEMA series, JM construction.
- Shaft** – Carbon steel inside a 300 Series stainless steel sealed removable shaft sleeve.
- Bearings** – Permanently sealed ball type, pre-lubricated.
- Thermal Overload Protection** – *Single-phase motors:* automatic reset; *Three-phase motors:* external thermal protection required.
- Max. Liquid Temperature** – 125° F
- Ambient Air Temperature** – 104° F
- Max. Pressure** – 75 PSI
- pH Range** – 6-14 cast iron

### FEATURES

- Compact and Lightweight** – Can be installed where most other 3 and 5 HP pumps will not fit... requires just 11-3/8" x 18-1/2". Complete pumps weigh only 86 to 120 lbs.
- 4-Position Discharge** – Permits installation with discharge horizontal or vertical, to right or left. Volute features drain port which is functional when discharge is vertical.
- Silicon Brass Impeller and Wear Ring** – Silicon brass impeller is precision cast and machined. Dynamically balanced for long seal life and quiet operation. Non-overloading. Contains no lead. Silicon brass wear ring is replaceable.
- Easy Service** – Back pull-out design: entire motor may be removed for servicing impeller, seal or motor without disturbing plumbing. Centerline discharge for ease of installation.
- Shaft Seal** – Self-flushing, mechanical John Crane Type 2. Ceramic and carbon seal faces. Stainless steel, brass and Buna N spring bellows.



## ORDERING INFORMATION

HIGH HEAD							
Catalog Number	HP	Pipe Tapping Sizes		Motor Voltage**	Phase	Max. Load Amps*	Approx. Wt. Lbs.
		Suct.	Disch.				
CCHH	3	2-1/2"	2"	230	1	13.4	80
CCHH3	3	2-12"	2"	230/460	3	8.6/4.3	66
CCHJ	5	2-1/2"	2"	230	1	22	94
CCHJ3	5	2-1/2"	2"	230/460	3	13.2/6.6	80
MEDIUM HEAD							
CCMH	3	2-1/2"	2"	230	1	13.4	80
CCMH3	3	2-1/2"	2"	230/460	3	8.6/4.3	66

\*Maximum load amps may vary with motor suppliers.  
 \*\*200 Volt and 575 Volt models are available. Consult factory.

Pro-Source® is a registered trademark of Sta-Rite Industries, Inc.  
 In order to provide the best products possible, specifications are subject to change.

# straight centrifugal pumps

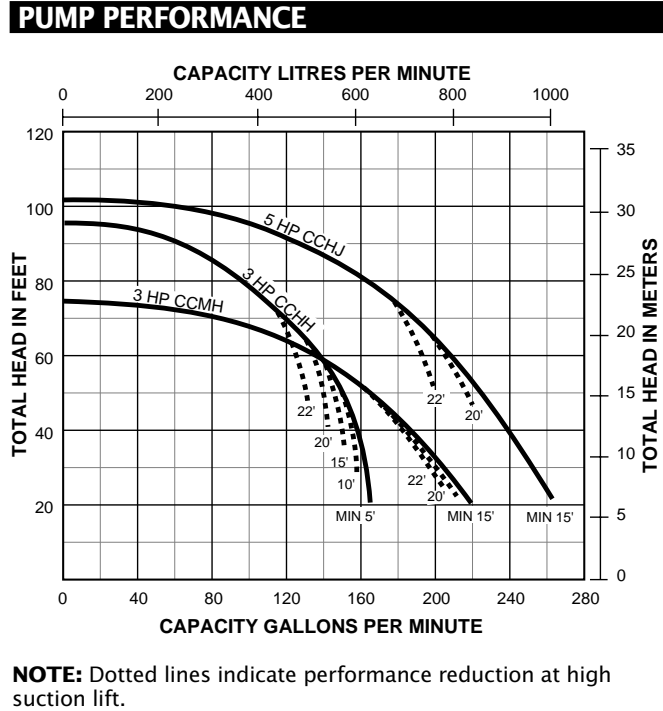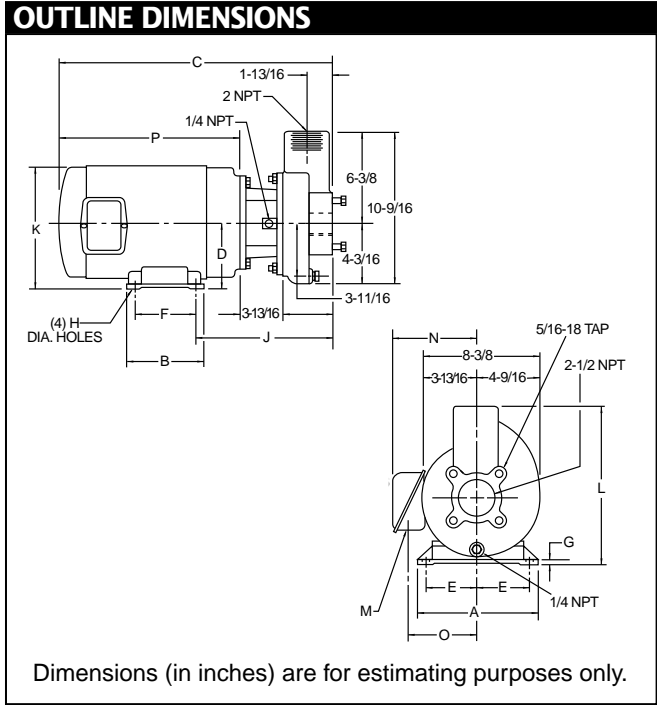

### DIMENSIONAL DATA

Cat. No.	A	B	C*	D	E	F	G*	H*	J	K	L	M*	N*	O*	P*
CCHH CCMH	9	6-1/2	21-1/2	4-1/2	3-3/4	4-1/2	7/16	7/16	10-5/16	9-23/32	10-7/8	3/4	8-1/8	6-1/2	14-1/8
CCHH3 CCMH3	7	6	18-13/32	3-1/2	2-3/4	5	9/32	11/32	9-9/32	7-7/32	9-7/8	3/4	6-29/32	5-13/32	11
CCHJ CCHJ3	9	7-1/2	22-1/2	4-1/2	3-3/4	5-1/2	7/16	7/16	10-5/16	9-23/32	10-7/8	3/4	9	6-15/16	15-1/8

\*Dimensions may vary with motor supplier.

### PUMP PERFORMANCE (Capacity in Gallons Per Minute)

HIGH HEAD								MEDIUM HEAD									
Cat. No.	HP	Disch. Pressure		Dynamic Suction Lift					Cat. No.	HP	Disch. Pressure		Dynamic Suction Lift				
		PSI	Feet Head	5'	10'	15'	20'	22'			PSI	Feet Head	5'	10'	15'	20'	22'
CCHH	3	20	46.2	148	142	134	125	116	CCMH	3	20	46.2	160	148	133	112	100
		30	69.3	110	98	85	70	60			30	69.3	-	-	-	-	-
		40	92.4	-	-	-	-	-			40	92.4	-	-	-	-	-
CCHJ	5	20	46.2	222	214	205	196	184									
		30	69.3	180	166	152	130	123									
		40	92.4	94	-	-	-	-									

Tested and rated in accordance with Water Systems Council Standards.

**NOTE:** Pumps installed with a Pro-Source® tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.